



TOOLS & ACCESSORIES

FOR SURVEYORS AND CONTRACTORS











2022 NEW PRODUCTS





Site MAX*

21 BALLISTIC BAGS

P. 49

Our product line of SiteMAXTM bags are constructed of high strength
Ballistic nylon-fiber material with heavy duty hardware and reinforcement stitching. The internal seams of the SiteMAX Ballistic bags are bound to prevent freying which provide maximum toughness and durability. Select from the many styles designed to fit your needs in the field or on the jobsite.













PRODUCT CATEGORIES

| | OPTICAL INSTRUMENTS | 4 |
|---|--------------------------------|----|
| | LASER TOOLS & ACCESSORIES | 7 |
| | PRISM SYSTEMS | 12 |
| | TRIBRACH SYSTEMS | 16 |
| | PRISM POLE SYSTEMS | 17 |
| | GNSS ROVER RODS | 20 |
| | BIPODS & TRIPODS, GPS TRIPOD | 21 |
| | ACCESSORIES-PRISM, POLE, BIPOD | 24 |
| | ACCESSORIES FOR GNSS, RODS | 25 |
| Ī | TRIPODS FOR INSTRUMENTS | 26 |
| Ī | LEVELING RODS | 31 |
| | MEASURING DEVICES | 34 |
| | MAGNETIC LOCATOR | 36 |
| Ī | HAND TOOLS | 37 |
| Ī | WORK GEAR | 39 |
| | FIELD SUPPLIES | 45 |
| _ | BAGS AND CASES | 49 |

SITEPRO GUARANTEE

Dave White's SitePro guarantees all our brands of tools and instruments against any defects in material or workmanship with a limited lifetime warranty.

For details and complete warranty, visit www.dwsitepro.com/guarantee/

David White

APPLICATIONS

- Measure angles, establishing 90-degrees reference lines
- Determine difference in elevation
- Check angles, alignment, and plumb
- Basic grade work
- Short range leveling
- Anchor bolt alignment
- Setting out curves
- Gravity flow pipe laser
- Aligning forms, walls





DIGITAL TRANSIT THEODOLITE


The David White DT8-Series digital transit theodolites give you accurate measurements for a wide range of construction and survey applications.

- Simple, push button functions gives the user precise LCD digital readouts
- Incremental encoding detection system
- Front and back digital displays



- Coaxial tangent and clamp screws for sighting and alignment
- Automatic power shut-off
- Built-in easy access battery pack
- · Water resistant, sealed construction

| sku | what's included? |
|---------------------------------------|---|
| LASER PLUMMET 46-D8896 | DT8-05LP Theodolites, sunshade, tool kit, rain cover, plumb bob, carrying case, rechargeable battery kit, alkaline battery tray, user guide |
| LASER SIGHT W/LASER PLUMMET 46-D8897 | DT8-05LS Theodolites, sunshade, tool kit, rain cover, plumb bob, carrying case, rechargeable battery kit, alkaline battery tray, user guide |





DIAGONAL EYEPIECE

- Easily mounts to DT8- to measure angles and points in any direction
- Provides an erect image, and 1° 30' angle
- Measure any target with a distance of at least 4-1/4' (1.3m) from the instrument





APPLICATIONS

- Gravity flow pipe laser setup
- Measure angles establishing 90-degrees reference lines
- Anchor bolt alignment
- Aligning forms, walls

LT8-300LTU

UNIVERSAL LINE TRANSFER UNIT

The LT8-300LTU is versatile and ideal for use with pipe aligning laser or as a level-transit. The 360° telescope design allows direct sight below the instrument for pipe laying applications.

- · Powerful 26X optics
- Accuracy: ±3/16-in at 150-ft (4.75mm at 45m)
- Range up to 400-ft (120m)
- Horizontal circle with lock
- Glass reticle with stadia lines for measuring distance (ratio 1:100)
- Plate vial for rough leveling and general plummeting requirements





LT8-300LTU Line Transfer Unit, rain hood, objective lens, case, user

46-D8879

LT8-300LTULP Line Transfer Unit, rain hood, objective lens, case, user



APPLICATIONS

- Medium range leveling
- Turning angles, establishing 90° reference lines
- Determine vertical angles, basic grade work Checking angles, alignment,
- and plumb Anchor bolt alignment
- Gravity flow pipe laser setup
- Aligning forms, walls

LT8-300

UNIVERSAL LEVEL-TRANSIT

The Dave White LT8-300 is rugged and dependable, making this five minute instrument the first choice for practically every horizontal and vertical sighting application in construction.

- Powerful 26X optics
- Accuracy: ±3/16-in at 150-ft (4.75mm at 45m)
- Range up to 400-ft (120m)
- · Vertical arc and horizontal circle with locks and tangents
- 1:100 stadia with glass reticle





David White Optical Instruments are guaranteed with a two (2) year limited warranty. Unless otherwise specified, hand levels and accessory items include a 90-day limited warranty.



26X

26X

32x

32x



David White®

APPLICATIONS

- Turning horizontal angles, establishing 90° reference lines
- Medium range leveling
- Checking angles, alignment
- Determine difference in elevation
- Leveling forms and footers
- Measuring cut-and-fill





AUTOMATIC LEVELS

Make every leveling job faster and easier with David White automatic levels. Superior design sighting scope and bubble vial are built into the housing for greater durability.

- Lock-out device protects compensator during transport
- Larger aperture allows more light for a sharper image
- Soft control knobs for easier grip
- D8932 model features wedge hairs for improved reading accuracy

user auide

Infinite tangent screw

AL8-26 automatic level, adjustment tools, lens cap, plumb bob, case,

AL8-26 automatic level, adjustment tools, lens cap, plumb bob, case,

AL8-32 automatic level, adjustment tools, lens cap, plumb bob, case,

AL8-32 automatic level, adjustment tools, lens cap, plumb bob, case,

- Horizontal circle with white on black graduations
- Wire-hung magnetically damped compensator holds the level line of sight within ±15 arc minutes of level



±1/16-in @ 100 ft

(±1.5mm @ 30m)

±1/16-in @ 100 ft

(±1.5mm @ 30m)

±1/32-in @ 100 ft

(±1.0mm @ 30m)

±1/32-in @ 100 ft

(±1.0mm @ 30m)

300-ft

(90m)

300-ft

(90m)

400-ft

(120 m) 400-ft

(120 m)



APPLICATIONS

- Short range leveling
- Turning angles, establishing
- Determine vertical angles, basic grade work
- Checking angles, alignment, and plumb





LT6-900

STANDARD KI

COMPLETE KIT

STANDARD KI

45-D8926

45-D8932

45-D8926K-11

45-D8932K-11

22X MERIDIAN LEVEL-TRANSIT

Ideal for light construction work such as leveling, turning angles, and vertical angles

LT6-900 transit-level, plumb bob, case, user guide

user guide, tripod, leveling rod

user guide, tripod, leveling rod

- ±1/4-in at 100-ft (6mm at 30m) accuracy
- Cross hairs with 1:100 stadia lines allowing you to determine the distance
- Up to 200-ft (60m) range
- Horizontal circle graduated to 1°, reads by vernier direct to 15-minutes
- Vertical arc read to degrees (0-45°)
- Horizontal lock and tangent screw provides precise movement control
- Built-in sunshade

LT6-900 transit-level, plumb bob, case, tripod, leveling rod, user guide

· Top mount leveling vial





APPLICATIONS

- Short range leveling
- Turning angles, establishing 90° reference lines
- Checking points in same horizontal plane
- Check elevations





L6-20

STANDARD KI


44-D8834

44-D8834K-11

22X MERIDIAN LEVEL

Designed for light construction work such as leveling and turning angles.

- ±1/4-in at 100-ft (6mm at 30m) accuracy
- Cross hairs with 1:100 stadia lines allowing you to determine the distance of the transit from the level rod
- Up to 200-ft (60m) range
- Horizontal circle graduated to 1°, reads by vernier direct to 15-min
- Top mount leveling vial
- Horizontal lock and tangent screw provides precise movement control
- Built-in sunshade for clearer sightings



David White Optical Instruments are guaranteed with a two (2) year limited warranty. Unless otherwise specified, hand levels and accessory items include a 90-day limited warranty.

1 Complete kits available: include alumimum tripod and aluminum rod. Specify leveling rod graduations when ordering, add **C** for 8ths, **T** for 10ths. *Example*: 44-D8834-1T would include the 10ths leveling rod.

43-D620

2X SIGHTING HAND LEVEL

- Ideal for preliminary survey and simple distance estimation
- Sturdy impact resistant aluminum body and easy-to-read protected vial
- 2-power fixed magnification
- Pocket clip



APPLICATIONS

- Measure angles. establishing 90-degrees reference lines
- Determine difference in elevation
- Check angles, alignment, and plumb
- Basic grade work
- Short range leveling
- Anchor bolt alignment Setting out curves
- Gravity flow pipe laser
- Aligning forms, walls





5-SEC DIGITAL THEODOLITE

The SitePro DT2-05 digital theodolite gives you accurate measurements for a wide range of construction and survey applications.


- Simple, push button functions give the user precise LCD digital readouts
- Incremental encoding detection system
- · Front and back digital displays
- Optical plummet 3X power
- Coaxial tangent and clamp screws for sighting and alignment

NEW!

- Automatic power shut-off
- Built-in easy access battery pack
- Water resistant, sealed construction

STANDARD KIT 26-DT205

DT2-05 Theodolites, sunshade, tool kit, rain cover, plumb bob, carrying case, rechargeable battery kit, alkaline battery tray, user guide









APPLICATIONS

- Turning horizontal angles establishing 90° reference
- Medium range leveling
- Checking angles, alignmen
- Determine difference in
- Leveling forms and footers
- Measuring cut-and-fill





SK SERIES

PRO AUTOMATIC LEVEL

This SitePro SK-Series professional automatic level features superior optics and excellent magnification with large aperture that allows more light for a sharper image.

- Magnetically dampened compensator quickly levels and stabilizes line of sight
- Cross hairs with 1:100 stadia lines
- Fine motion horizontal tangent knobs on left and right sides
- Solid leveling base with three leveling screws
- 360° graduated horizontal circle in 1-degree increments
- Circular bubble vial can be easily viewed with 90-degree mirror
- Includes lens cover, plumb bob, adjustment tools, case, user guide
- Weather resistant- IP54

| sku | magnification | accuracy | range | field of view | compensator range | wgt |
|---------------------------------------|---------------|-----------------------------------|------------------|---------------|-------------------|-------------------|
| STANDARD KIT 25-SK32X ¹ | 32X | ±1/16" @ 250 ft (±1.5mm @ 76m) | 400-ft (120m) | 1° 20' | ±0.3", +/-15' | 3.65lb (1.6kg) |
| STANDARD KIT 25-SK28X ¹ | 28X | ±1/16" @ 200 ft (±1.5mm @ 60m) | 350-ft (105m) | 1° 20' | ±0.4", +/-15' | 3.65lb (1.6kg) |
| STANDARD KIT 25-SK24X ¹ | 24X | ±1/16" @ 150 ft (±1.5mm @ 46m) | 300-ft (90m) | 1° 25' | ±0.5", +/-15' | 3.65lb (1.6kg) |



APPLICATIONS

- Short range leveling
- Turning angles, establishing 90° reference lines
- Determine vertical angles, basic grade work
- Checking angles, alignment, and plumb








TL20X

20-POWER TRANSIT LEVEL

The TL 20X transit level is ideal for leveling and vertical applications.

- Fast set-up, simple to use
- Clamps and tangents bring your instrument quickly on target
- 3-screw leveling base with 5/8-11 thread for tripod
- Built-in sunshade with rubber eyepiece
- · Includes plumb bob, adjustment tools, case, user guide
- 15minute horizontal circle
- Stadia





1 Complete kits available; include alumimum tripod and aluminum rod. Specify leveling rod graduations when ordering, add C for 8ths, T for 10ths. Example: 25-SK32K-T would include the 10ths level





Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

APPLICATIONS

- Adjusting and checking elevations
- General construction leveling such as concrete forms and footers
- Vertical alignment and plumb such as form alignment
- Single and dual grade and excavating
- Commercial and residential construction such as leveling & aligning walls, installing ceilings & floors



*Detector may be different than shown

RL322GR

DUAL GRADE ROTARY LASER WITH VERTICAL ALIGNMENT

- Electronic self-leveling accuracy up to 3/32" at 100-ft (2.4mm at 30m)
- Working range up to 2,400-ft (730 m)
- Ideal for both indoor and outdoor applications
- -7% to +7% in both X and Y axis dial-in grade (single slope: ±10.00%)
- Illuminated display for precise level, grade, and vertical alignment
- 90° layout beams, variable speed, scan angles, and beam positioning
- Smart H.I. Alert System stops rotating and alerts user when laser has been disturbed or drifts

STANDARD KIT

27-RL322GR

RL 322GR Laser, RD 202 Detector, Rechargeable NiMH Battery Pack, Alkaline Battery Pack, Remote, Target, Glasses, Carrying Case, User Guide





APPLICATIONS

- Interior & exterior, light to medium commercial, residential construction
- Leveling, alignment and squaring
- Checking elevations, footings, foundations
- Square and align walls, partitions, and corners
- Installing ceilings & floors



*Detector may be different than shown.

LR430HDV

3-D ROTARY LASER

- Leveling accuracy: 1/16-in at 100 feet (1.8mm at 30m)
- Working Range up to 2,950 ft (900m)
- Extremely high rotation speed
- Three integrated rotary heads
- Compact, ergonomic design with single button operation
- Multiple scan angles, beam positioning, and variable rotation speeds
- Single axis ±7.0% slope



what's include

27-LR430HDV

27-LR430HDV-41

LR 430HDV rotary laser, laser detector, remote, universal mount, magnetic target, glasses, rechargeable battery/charger kit, 4-'C' alkaline batteries, carrying case, user guide

LR 430HDV rotary laser, laser detector, remote, universal mount, magnetic target, glasses, rechargeable battery/charger kit, 4-'C' alkaline batteries, carrying case, **tripod**, **leveling rod**, user guide



Dave White's SitePro LR-Series and RL-Series Rotary Lasers are guaranteed with a two (2) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

1 Complete kits available: include alumimum tripod and aluminum rod. Specify leveling rod graduations when ordering, add **C** for 8ths, **T** for 10ths. Example: 27-LR430HDV-4T would include the 10ths leveling rod.

Choosing The Right Rotary Laser.











| | ŀ | KS SERIES ROTARY LASERS | 6 | PRO SERIES R | OTARY LASERS |
|----------------------|-----------------------------|-----------------------------|-----------------------------|--------------------------------|---------------------------------|
| | KS100H | KS 100HV | KS 100HVG | LR430HDV | RL322GR |
| Leveling Accuracy | ±1/8" (±3mm) | ±1/8" (±3mm) | ±1/8" (±3mm) | ±1/16" (±1.8mm) | ±3/32" (±2.4mm) |
| Leveling Type | Electronic, ±5° | Electronic, ±5° | Electronic, ±5° | Electronic, ±4° | Electronic, ±5° |
| Working Range (dia.) | | | | | |
| without Detector | | | 295 ft (90m) | 65 ft (20m) | 65 ft (20m) |
| with Detector | 1,000 ft (305m) | 1,000 ft (305m) | 1,000 ft (305m) | 2,950 ft (900m) | 2,400 ft (730m) |
| Functions | | | | | |
| Slope/Grade | Dual Slope, -8.0%, +8.0% | Dual Slope, -8.0%, +8.0% | Dual Slope, -8.0%, +8.0% | Single Slope, ± 7.0% | Dual Dial-In, -10.0%, +10.0% |
| Scanning | | Preset: 0°, 15°, 45°, 90° | Preset: 0°, 15°, 45°, 90° | Preset: 0°, 15°, 45°, 90° | Preset: 0°, 10°, 45°, 90°, 180° |
| Height Alert | Yes | Yes | Yes | Yes | Yes |
| Rotation speed(s) | 600 rpm | 150, 300, 600 rpm | 150, 300, 600 rpm | 400, 800, 2000 rpm | 60, 120, 300, 600 rpm |
| Power Supply | 4-C Alkaline | 4-C Alkaline | 4-C Alkaline, NiMH Battery | 4-C Alkaline & Lithium Battery | 4-C Alkaline & NiMH Battery |
| Environment | IP 54, Water/Dust Resistant | IP 54, Water/Dust Resistant | IP 54, Water/Dust Resistant | IP 55, Water/Dust Resistant | IP 65, Waterproof |



Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

KEEP IT SIMPLE.

APPLICATIONS

- Leveling, checking elevations, concrete forms
- Installation of decks, pools, drop ceilings, floors
- Excavating, digging footings, septic systems





KS100H

BASIC HORIZONTAL ROTARY LASER

Keep it simple with the KS 100H horizontal electronic self-leveling rotary laser for precise leveling applications.

- · Ideal for outdoor use
- · Simple button operation, easy to use
- ±1/8-in at 100-ft (3.0mm at 30m) leveling accuracy
- Up to 1000-ft (305m) working range
- · Electronic self-leveling

| • | Dual axis slope (±8%) for simple |
|---|----------------------------------|
| | slope applications |

- Anti-Drift System alerts user when laser has been disturbed or drifts
- Enclosed Rotor Housing keeps laser safe from tough jobsite conditions



STANDARD KIT 27-KS100H

KS 100H rotary laser, detector with bracket, alkaline battery compartment and batteries, case, user guide

27-KS100H-41

KS 100H rotary laser, detector with bracket, tripod, leveling rod, alkaline battery compartment and batteries, case, user guide

APPLICATIONS

- Leveling, checking elevations, concrete forms, footings, foundations
- Estimating cut and fill
- Manual slope
- Installation of decks, pools, drop ceilings, floors
- Excavating, digging footings, septic systems





KS100HV

HORIZONTAL/VERTICAL ROTARY LASER

- · Ideal for indoor and outdoor use
- Horizontal and vertical electronic ±4° self-leveling
- Simple button operation, easy to use
- ±1/8-in at 100-ft (3.0mm at 30m) leveling accuracy
- Up to 1000-ft (305m) working range
- Dual axis slope (±8%) for simple slope applications
- Anti-Drift System alerts user when laser has been disturbed or drifts
- Enclosed Rotor Housing keeps laser safe from tough jobsite conditions



27-KS100HV

STANDARD KIT

KS 100HV rotary laser, laser detector with bracket, universal mount, magnetic target, glasses, 4-'C' alkaline batteries, carrying case, user guide

27-KS100HV-41

KS 100HV rotary laser, laser detector with bracket, universal mount, magnetic target, glasses, 4-'C' alkaline batteries, carrying case, tripod, leveling rod, user quide

APPLICATIONS

- Leveling, checking elevations, concrete forms, footings, foundations
- Installing cabinets and finish carpentry
- Manual slope work Installation of decks, pools, drop ceilings, floors
- Excavating, digging footings, septic systems





KS100HVG

HORIZONTAL/VERTICAL GREEN ROTARY LASER

- Ideal for indoor and outdoor use
- Horizontal and vertical electronic ±4° self-leveling
- 4X brighter and more visible than red beam lasers, Ideal for indoor and outdoor use
- · Simple button operation, easy to use
- ±1/8-in at 100-ft (3.0mm at 30m) leveling accuracy
- Up to 1000-ft (305m) working range
- Dual axis slope (±8%) for simple slope applications
- · Anti-Drift System alerts user when laser has been disturbed or drifts
- · Enclosed Rotor Housing keeps laser safe from tough jobsite conditions



KS 100HVG rotary laser, laser detector with bracket, remote universal mount, magnetic target, glasses, NiMH rechargeable battery pack w/charger, alkaline batteries, carrying case, user guide

27-KS100HVG-41

KS 100HVG rotary laser, laser detector with bracket, remote universal mount, magnetic target, glasses, NiMH rechargeable battery pack w/charger, alkaline batteries, carrying case, tripod, leveling rod, user guide

Dave White's SitePro KS-Series Rotary Lasers are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.


1 Complete kits available: include alumimum tripod and aluminum rod. Specify leveling rod graduations when ordering, add C for 8ths, T for 10ths. Example: 27-KS100H-4C would include the 8ths le



Class 2M

Call: (765) 581-4097 | Fax: (765) 581-4098 | Website: dwsitepro.com

NEW!





Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

APPLICATIONS

- Level, horizontal & vertical layout, square, & plumb
- · Alignment of interior walls
- Drop ceiling or acoustical ceiling installation
- Cabinet & trim installation, finish carpentry





APPLICATIONS

• Level, horizontal & vertical

layout, square, & plumb Layout, alignment, and

squaring of interior walls

Drop ceiling or acoustical

Installation of recessed

Cabinet & trim installation

ceiling installation

lighting, ductwork, plumbing

finish carpentry

KS2L

CROSS LINE LAYOUT LASER

The KS 2L projects a vertical and horizontal laser line, ideal for one person leveling, plumb, and layout applications.

- ±1/8-in at 30-ft (3mm at 10m) leveling accuracy
- Up to 100-ft (30m) working range
- Small, compact design
- Detector mode allows laser to be used with optional line laser detector
- Adapter and support base with strong magnets, 1/4-20 and 5/8-11 thread, slots for screws or nails, raceways for optional straps
- Three modes of operation
- Easy access battery compartment
- Self-Leveling up to ± 3°

28-KS2L KS2

KS 2L laser, versatile mount, target, batteries, hard case, user guide

KS**2LG**

CROSS LINE LAYOUT GREEN BEAM LASER

The KS 2L G projects a hi-vis green vertical and horizontal laser line, ideal for one person leveling, plumb, and layout applications.

- ±1/8-in at 30-ft (3mm at 10m) leveling accuracy
- 4 times brighter than red beam lasers for better visibility
- Up to 100-ft (30m) working range
- · Small, compact design
- Easy access battery compartment
- Detector mode allows laser to be used with optional green beam line laser detector
- Adapter and support base with strong magnets, 1/4-20 and 5/8-11 thread, slots for screws or nails, raceways for optional straps
- Self-Leveling up to ± 3°

28-KS2LG KS 2LG laser, versatile mount, target, batteries, hard case, user guide

Class 2M



APPLICATIONS

- Level, 90° layout, square, and plumb
- Layout and squaring interior walls and drywall track
- Point transfer
- Cabinet installation and finish carpentry



KS5P

5-POINT LASER

The simple to use KS 5P is a versatile laser tool ideal for one person leveling, plumb, layout and squaring. Projects five 90° points for a wide range of applications.

- ±1/4-in at 100-ft (3mm at 30m) accuracy
- Up to 100-ft (30m) working range
- Small, compact design
- Bright, highly focused laser points
- Self-leveling spot beams up to \pm 6°
- Easy access battery compartment
- Includes UM1P multi-mounting device for quick positioning of the laser beams

28-KS5P

KS 5P laser, UM1P mount, target, batteries, hard case, user guide



APPLICATIONS

- Level, 90° layout, square, and plumb
- Layout and squaring interior walls and drywall track
- Point transfer
- Cabinet installation and finish carpentry



KS**5PG**

5-POINT GREEN BEAM LASER

The simple to use KS 5PG is a green beam laser tool ideal for leveling, plumb, layout and squaring. Projects five 90° points for a wide range of applications.

- ±1/4-in at 100-ft (3mm at 30m) accuracy
- Up to 100-ft (30m) working range
- Small, compact design
- Bright, highly focused green laser points
- Self-leveling spot beams up to ± 6°
- Easy access battery compartment
- Includes UM1P multi-mounting device for quick positioning of the laser beams



 $\ensuremath{\mathsf{KS}}\xspace$ 5PG laser, UM1P mount, target, batteries, hard case, user guide





 \mathbb{A}

Dave White's SitePro KS-Series Rotary Lasers are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

RD105

COMPACT PRO LASER DETECTOR

- Front and rear LCD displays allow easy, fast visual detection of laser beam for exterior applications
- · Automatic shut-off after 20-minutes without use
- Fine and coarse (2mm | 5mm at 50m) ongrade sensitivity settings for easy grade
- · Strong built-in magnets on side and top
- Rugged housing and gasket seal (IP54)

| sku | what's included? | Use with: | | |
|-----------|---|--------------------------------------|--|--|
| 27-RD105 | RD 105, rod clamp (#27-RB202), 4 AAA alkaline batteries | Most Red Beam Rotary Lasers | | |
| 27-RD105G | RD 105G, rod clamp (#27-RB202), 4 AAA alkaline batteries | Most Green Beam Rotary Lasers | | |



RD202 SERIES

LASER DETECTOR WITH LARGE CAPTURE WINDOW

- Large 4.9" (125mm) capture height allows Rugged housing with gasket seal (IP55) quick detection
- · Fine and coarse on-grade sensitivity settings for easy grade detection
- Front and rear LCD displays allows easy, fast visual detection
- · Strong built-in magnets on side and top
- Automatic shut-off preserves battery life
- Simultaneous elevation LED indicators on front for fast, easy visual



27-RD202

RD 202, rod clamp (#27-RB202), 9v battery

Most Red Beam Rotary Lasers

Dave White's SitePro Laser Detectors are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

27-MT4

UNIVERSAL MULTI-MOUNT

- · Ideal for drop ceilings, remodeling, and masonry
- · Quick release push button
- Fine adjustment knob to precisely align laser to intended target
- Graduated scale (±2" and ±50mm markings) -1/8" and millimeters
- Spring lever for quick attachment to drop ceiling
- · Key slot to quickly mount to a stud or wall using nails or screws
- Weighs 3.0lb (1.4kg)

27-BBMOUNT


BATTER BOARD MOUNT CLAMPING SYSTEM

- · Ideal for setting up an instrument for vertical alignment application
- Securely attaches instrument to beam or joist up to 2.17" (55mm)
- Removable 5/8-11 mounting plate easily fastens to instrument
- Easy-grip locking knobs ensure secure attachment to joist
- Fastener hole to ensure position of a theodolite's axis is precisely over point
- Weighs 2.43lb (1.10kg)

27-4852-16

HEAVY-DUTY COLUMN CLAMP

- 12" (30.48cm) adjustable vertical column
- 6" (15cm) flat platform with 5/8-11 thread mounting stud
- Rubber bumper for hand and finger protection
- 10 ft (3.05m) strap with load rating of 2,200lb (1,000kg)
- Heavy duty ratchet to create a strong connection to round or square columns
- Center line of the 5/8-11 stud to column measures 15-in (38.1cm)

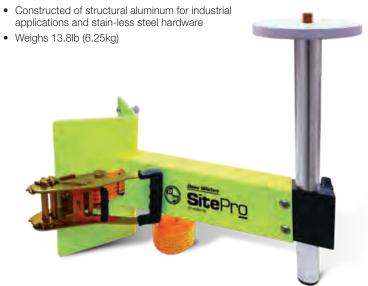



INSTRUMENT CASES PADDED STORAGE CASES

• For your SitePro and David White precision measuring instrument

· Durable outer shell and heavy duty protective padding



| sku | designed for |
|---------------|--|
| 25-SPCASE-XP | Hard Shell Padded Case for SK AutoLevel Series |
| 25-TL20X-CASE | Hard Shell Case for TL20X, LT6-900 Transit |
| 27-LR4CASE | Hard Shell Padded Case for LR4 Rotary Laser Series |
| 27-SLR200CASE | Hard Shell Padded Case for KS-100HV, KS-100HVG, RL-322GR |
| 27-SLR300CASE | Hard Shell Padded Case for KS-100H |
| 44-D8824-CASE | Hard Shell Case for L6-20 Level |
| 46-DT8CASE | Hard Shell Padded Case for DT-205 and DT8-05 Theodolite |

BATTERY PACKS AND CHARGERS





| sku | designed for |
|------------------|---|
| 27-LR4LIBATPK | LI-ION Battery/Charger Kit for LR-Series Rotary |
| 27-SLRNIMHKIT | NiMH Battery Pack/Charger Kit for KS 100 Series and SLR Series Rotary Laser |
| 46-DT805-CHARGER | Battery Charger for DT8-05, DT-205 Theodolite |
| 46-DT8BAT-NIMH | NiMH Battery Pack for DT8-05 Series and DT-205 Theodolite |

DIGITAL LEVELS

DL-SERIES

DIGITAL LEVEL

The SitePro **DL-Series** digital level is a level that provides measurement of level, plumb, or slope. Precision-machined aluminum construction is lightweight and durable. Precise digital readout ensures complete accuracy over the centered bubble vial.

- · Precise digital measurements display in degrees, percent, or inches/feet
- · Absolute and relative angle measurement
- · High visibility LCD with back-lit display with audible level and plumb indicator
- Reference function sets any slope to 0.0°
- Digital measurement readout flips when upside down for ease of use
- Light weight, rugged aluminum construction
- Quick horizontal and vertical calibration
- Hold function locks measurement readout
- Includes: Digital level, AAA batteries, nylon padded case with carry strap, user guide

| | DIGITAL LEVELS | | | | | |
|--------------------|---|-------------|--|--|--|--|
| | 29-DL24 | 29-DL48 | | | | |
| Length (Approx.) | 24" (62cm) | 48" (120cm) | | | | |
| Measuring Range | 0–360° (4 x 90°) | | | | | |
| Measuring Accuracy | o° and 90°, ±0.1°; -1° to 89°, ±0.2°" | | | | | |
| Weight | 1.34lb (610g) 2.65lb (1200g) | | | | | |
| Dimensions | 23.7 x 2.6 x 1.2" (62 x 6.6 x 3cm) 47.3 x 2.6 x 1.2" (120 x | | | | | |

Dave White's SitePro DL-Series Digital Levels are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.








9300N

0/-30MM TILTING NITROGEN-FILLED PRISM SYSTEM

The advanced SitePro 9300 nitrogen (N2) sealed 0/-30mm prism system features a single tilting assembly with front lever locking mechanism to secure in position. This hi-performance prism system, precisely positioned in hi-grade aluminum holder ensures accurate measurement and is best for surveying.

- 62mm precision ground glass, up to 2 arc second accuracy
- · Nitrogen sealed prism canister prevents condensation on glass lens
- · Height of the prism in the holder is 100mm
- 0/-30mm offset constant
- Dual-sided aluminum target 6.9" x 5.5" (17.6cm x 14cm)
- 5/8-11 stainless steel bayonet adapter (female thread)









1010 SERIES

0/-30MM SINGLE TILTING PRISM SYSTEM

The SitePro 1010-series tilting single prism system features a weather-proof sealed 2-1/2" prism, all-metal holder and 5.5 x 7-inch (14 x 17.8cm) target.

- 0/-30mm constant prism system, up to 5 second accuracy
- Weather-proof sealed 62mm precise glass
- Stainless steel tension knob to easily adjust target
- M20 x 2 mount thread, 5/8-11 bayonet adapter
- Includes prism, target and holder assembly, protective cap, 21-1010 padded case

| adjust target | | | | | | |
|---------------|-----------|------------------|------------|---------------------|----------|-------------|
| sku | offset | prism type | prism size | target color | accuracy | axis height |
| 03-1010-CC | 0 / -30mm | copper | 62mm | flo-orange w/black | ≤5 sec | 100mm |
| 03-1010-FC | 0 / -30mm | copper coated | 62mm | flo-lime w/black | ≤5 sec | 100mm |
| 03-1010-0 | 0 / -30mm | standard | 62mm | Flo-orange w/black | ≤5 sec | 100mm |
| 03-1010-Y | 0 / -30mm | standard | 62mm | Yellow w/black | ≤5 sec | 100mm |







2010M SERIES

SINGLE TILT PRISM SYSTEM, POLYCARBONATE

The SitePro 2010M series single tilting 0/-30mm prism system is an affordable high quality prism.

- 62mm precision ground glass, up to 2 arc second accuracy
- Single tilt holder tilts to 360 degrees with built-in peep sight for easy setup
- Can be mounted in either 0 or -30mm offset positions
- Height of the prism in holder is 120mm
- Nickel plated aluminum 5/8-11 bayonet adapter
- Fully compatible with leading manufacturers such as Sokkia, Trimble, Topcon, and other systems
- Prism canister and holder/target molded from durable lightweight polycarbonate, with metal yoke and nylon washer
- Includes: prism, target and holder assembly, protective cap, 21-2010 padded case

| sku | offset | prism type | prism size | target color | accuracy | axis height |
|------------|-----------|------------|------------|--------------------|----------|-------------|
| 03-2010M-0 | 0 / -30mm | standard | 62mm | Flo-orange w/white | ≤5 sec | 120mm |
| | | | | | | |





PRISM IN CANISTER

0/-30MM PRISMS

- Weather-proof sealed precise prism
- 62mm diameter prism
- M20x2 male mounting thread





| sku | dia (mm) | type | color | accuracy | replacment for models |
|------------|----------|---------------|------------|----------|-----------------------|
| 03-2011-0 | 62mm | std | flo-orange | ≤ 5" | 1010, 2010M |
| 03-2011-CC | 62mm | copper coated | flo-orange | ≤ 5" | 1010, 2010M |
| 03-2011-FC | 62mm | copper coated | black | ≤ 5" | 1010, 2010M |
| 03-2011-Y | 62mm | std | flo-yellow | ≤ 5" | 1010, 2010M |
| 03-9311N-0 | 62mm | nitro-filled | flo-orange | ≤ 2" | 9300 |

TILTING TARGET & HOLDER

These SitePro target and holder assemblies are tilting and ideal for night time or low-light work conditions.





| sku | description | color |
|------------|--|--------------------|
| 03-1012-0 | Target & holder with rear tension knob | Flo-orange/Black |
| 03-1012-Y | Target & holder with rear tension knob | Flo-yellow w/Black |
| 03-2012M-0 | Poly target & metal holder with 360 degree tilting | Flo-orange/Black |

SWISS-STYLE PRISM

3024

62MM SWISS-STYLE PRO PRISM SYSTEM WITH LARGE TARGET

- 62mm circular prism system is designed for high accuracy and maximum range
- High precision with less than 2" beam deviation
- 2.0mm centering accuracy, constant of 0mm
- Range up to 11,500 ft (3,500m)
- Copper coating with special resistant coating to prevent reflectivity caused by small particles or condensation
- Large removable aluminum target
- Includes: 3024 prism system; prism cap; padded case

| | description | COIOF | Till Height | |
|---------|--|-----------------|-------------|--|
| 03-3024 | 62mm Swiss-Style Pro Precision Prism System with Large Target | Black/Flo-green | 86mm | Leica Offset: 0; Actual Offset: -34.4 |



LPR121

SWISS-STYLE PRO PRISM SYSTEM

- Built-in sight alignment
- High precision with less than 2" beam deviation, 2.0mm centering accuracy
- Copper coating with special resistant coating to prevent reflectivity caused by small particles
- Range up to 11,500 ft (3,500m)
- Mounted in metal holder with detachable target
- Includes: LPR121 prism system, cap, padded case

| provent remotivity educed by email particles | | | | |
|--|--|---|-------------|--|
| sku | description | color | Tilt Height | Offset |
| 03-LPR121 | Swiss-Style Pro Precision Circular Prism System | Black w/Flo-green side1, Flo-red side2 | 86mm | Leica Offset: 0; Actual Offset: -34.4 |



03-1518-R

MINI PRISM STAKEOUT POLE SYSTEM

- 25mm precise mini prism with 0/-30mm offset tilting aluminum prism and holder
- · Black anodized sealed aluminum can
- Two on-board circular bubble vials
- · Four (4) precison machined sectional poles
- Includes prism system, four (4) sectional poles, point, adjustment tools, and case
- Weighs 1.7lb (0.77kg)



03-1558-RC

MINI-PRISM WITH LARGE TARGET

- · All anodized aluminum holder, target and can
- Tilting target, 0/30mm offset
- 25.4mm copper coated prism
- 5/8-11 mounting thread
- · 40-min adjustable circular sidemounted vial
- Includes: plumb bob prism point w/hook (#03-1507), bracket (#03-1516), 5/8-11 height extension, case



03-1520-0C

STAKEOUT MINI-PRISM

- 25mm copper-coated mini prism
- 0/-30mm offset tilting prism assembly
- Top & bottom adjustable bubble
- Includes replaceable point, carrying case
- Weighs 0.9lb (0.41kg)



03-1503

MINI PRISM SET

- 25mm precise mini prism with 0mm offset
- 3 aluminum sectional poles with hanging hook to extend to 1.8mm
- On-board circular bubble vial
- Includes prism, three (3) sectional poles, point, hook, protective tube and case



FIXED L-BAR 25MM MONITORING PRISM

- · Ideal for surveying locations where a permanent mounting is needed
- 25mm copper-coated prism which is water and dust proof, 0mm offset
- Assembly made of black anodized aluminum, 10.3mm ID mounting hole

1500/1600

0/-30MM MINI PRISM SYSTEM

- · 25mm prism, black anodized sealed aluminum can
- 5/8-11 mounting thread
- 40-min adjustable circular
- Includes: mini prism, prism holder, plumb bob prism point, S-hook, prism mount, 5/8-11 height extension, carrying case with belt loop





| | | prism type | | |
|------------|------|---------------|----------------|--------|
| 03-1500-0 | 25mm | Standard | Side Mounted | Orange |
| 03-1500-CC | 25mm | Copper Coated | Side Mounted | Orange |
| 03-1600-0 | 25mm | Standard | Center Mounted | Orange |



MINI PRISM ACCESSORIES

| sku | description | mount thread |
|---------|---------------------------------|--------------|
| 03-1511 | 25.4mm Prism w/Canister | M6- male |
| 03-1507 | Plumb Bob Holder/Point & S-Hook | 5/8-11 |
| 03-1516 | Prism Mount, 0/-30mm Offset | M6- female |






RSZ-SERIES

REFLECTIVE ADHESIVE TARGETS

- Recommended for carrying out distance measurements using a tachymeter or total station
- Reflective target with red crosshairs
- Sheet of 10 targets (03-RSZ6-4 has 4 targets per sheet)




| sku | contains | qty/sheet | range (approx) | target size |
|------------|-----------------------|-----------|----------------|-------------|
| 03-RSZ2-10 | Sheet of 21mm Targets | 10 | 50 m | 21mm x 21mm |
| 03-RSZ3-10 | Sheet of 30mm Targets | 10 | 80 m | 30mm x 30mm |
| 03-RSZ4-10 | Sheet of 40mm Targets | 10 | 100 m | 40mm x 40mm |
| 03-RSZ6-4 | Sheet of 60mm Targets | 4 | 120 m | 60mm x 60mm |

RT-SERIES

REFLECTIVE RETRO ADHESIVE TARGETS

- These self adhesive reflective targets can easily be seen in daylight.
- 0 constant standard deviation at shortest target range 10m is less than 1.0mm
- Available in seven (7) different sizes, Packaged with 10 targets



| sku | contains: | qty/pack | | size |
|-----------|-------------------------|----------|------|-------------|
| 03-RT20MM | Package of 20mm Targets | 10 | 50m | 20mm x 20mm |
| 03-RT30MM | Package of 30mm Targets | 10 | 80m | 30mm x 30mm |
| 03-RT40MM | Package of 40mm Targets | 10 | 100m | 40mm x 40mm |
| 03-RT50MM | Package of 50mm Targets | 10 | 110m | 50mm x 50mm |
| 03-RT60MM | Package of 60mm Targets | 10 | 120m | 60mm x 60mm |
| 03-RT70MM | Package of 70mm Targets | 10 | 130m | 70mm x 70mm |
| 03-RT90MM | Package of 90mm Targets | 10 | 140m | 90mm x 90mm |







1360


360° MINI REFLECTOR SYSTEMS

- Compatible with Leica instruments and offsets
- +30mm constant
- Precise standards, ≤5 sec. accuracy
- Ideal for 360° surveying applications
- Includes 4-section pole set, mount with bubble vial, point, carrying case

| sku | constant | accuracy | wgt |
|---------|----------|----------|---------------|
| 03-1360 | +30mm | ≤5 sec | 1.7lb (.77kg) |







ATP360


BUILDER SERIES 360° ROBOTIC PRISM

- -7mm constant
- Efficient solution compatible with Sokkia and Topcon robotic stations
- ≤5 sec. accuracy
- Six (6) precision-machined cubes mounted in solid metal core housing
- 5/8-11 mounting thread on top and bottom

| sku | constant | accuracy | wgt |
|-----------|----------|----------|----------------|
| 03-ATP360 | -7mm | ≤5 sec | 0.46lb (0.2kg) |







GMAX360

360° ROBOTIC PRISM


- · Compatible with Leica
- +23.1 constant
- ≤5 sec. accuracy
- Six prisms are arranged to provide high pointing accuracy
- Working range up to 2000-ft (600m)
- Includes: 360 robotic prism, protective wrap, carrying case (#21-GMX360)

| sku | constant | accuracy | wgt |
|------------|----------|----------|----------------|
| 03-GMAX360 | +23.1mm | ≤5 sec | 0.46lb (0.2kg) |





15



3600

360° ROBOTIC PRISM SYSTEM

- Precision 360° robotic prisms ensure tracking lock
- Compatible with Spectra
- Seven 25.4mm prisms; ≤5 sec. accuracy
- Includes 4" (102mm) height adapter system with 5/8-11 thread, padded carrying case

| sku | constant | accuracy | wgt |
|---------|----------|----------|----------------|
| 03-3600 | +2.0mm | ≤5 sec | 1.11lb (0.5kg) |



05-1400-GY

OPTICAL PLUMMET TRIBRACH

- High-precision, smooth locking mechanism with secure motion foot screws
- Access for Japanese Style EDM systems, electronic and optical theodolites
- Precise alignment of support cavity to the 5/8-11 threaded base plate assures accurate centering of instrument
- Circular vial with 10-minute/2mm sensitivity
- Push-pull slide focus
- Optical plummet
 – over point accuracy 0.5mm 15m
- Weighs 1.85lb (0.84kg)

05-1300-B

LASER TRIBRACH

- High-precision, smooth locking mechanism with secure motion foot screws
- · Circular vial with 8-minute sensitivity
- Precise alignment of support cavity to the 5/8-11 threaded base plate assures accurate centering of instrument
- Laser plummet- accuracy 0.5mm 15m
- Push-button switch located close to body prevents accidental turning on
- CR2 lithium battery (included) provides 10 hrs of continuous operation
- Weighs 2.2lb (0.98kg)

05-1201-B

BASIC TRIBRACH

- Smooth locking mechanism
- 8-minute circular vial
- Precision aligned support cavity on 5/8-11 threaded base plate assures accurate centering of instrument
- Weighs 1.85lb (0.84k)



05-1200

EUROPEAN OPTICAL PLUMMET TRIBRACH

- Smooth locking mechanism
- 8-minute circular vial
- Precision aligned support cavity on 5/8-11 threaded base plate assures accurate centering of instrument
- Optical plummet- over point accuracy 0.5mm 15m
- Available colors: Black (-B) or Yellow (-Y)
- Weighs 1.85lb (0.84kg)

05-1200-BBAG

TRIBRACH WITH CASE

- · Protects tribrach during transport and storage
- Bag (21-1200) is also available separately (fits all 05-1200 model tribrachs)
- Size: 9" x 8.5" x 5.5"
- Includes: 05-1200-B Tribrach, Padded Case



2500 SERIES

TRIBRACH ADAPTERS

- Anodized black aluminum
- 5/8-11 brass thread mounting
- Anodized aluminum mounting studs







| sku | style |
|---------|---|
| 05-2520 | Fixed Tribrach Adapter, 5/8-11 female thread |
| 05-2521 | Friction Type Rotating Tribrach Adapter |
| 05-2525 | Zeiss/Wild Type Rotating Tribrach Adapter, Adjustable |

3511K

TRAVERSE ADAPTER SYSTEMS

- For precise setups and traversing applications
- 2.5X optical plummet
- 60-second plate vial, adjustable
- Precision-machined axis rotates 360°
- · Compatible with all prisms with a 24.9mm bayonet base
- Adjustable height:100mm to 120mm
- Traverse tribrach adapter fits all standard three-prong tribrachs
- The over point accuracy is 0.5mm at 1.5m



21-3500PROTECTIVE HARD CASE

- Padded to protect instruments during transport and storage
- Carries your traverse kit
- Included with 05-3511K

| sku | description |
|-----------|---|
| 05-3511K | Traverse Kit - Includes 05-3511 Tribrach Adapter, 05-1201-B Tribrach, 03-1010-O Prism System (Page 12), 21-3500 Padded Hard Case |
| 05-3511 | Traverse Tribrach Adapter with Optical Plummet |
| 21-3500 | Padded Hard Case, for Traverse Kit |
| 05-1200-B | European Optical Plummet Tribrach |
| 03-1010-0 | 0/-30mm Single Tilting Prism System (Page12) |

07-4712-TIMA-FY

7-4708-TMA



All SitePro rods and poles include carrying case with shoulder strap



QuickTip[™]

VERSATILITY ON THE JOBSITE

ALL PRISM POLES INCLUDE THE

UNIVERSAL ADAPTER SET

INCLUDED with 2.6m, 3.6m, and 4.65m Prism Poles

Includes QuickTip Adapters to set fixed height of pole for use with Zeiss 360, CST 1010, SitePro 1010, and others with target height of 100mm



QuickTip™ Adapter Set



4700 SERIES

TWIST LOCK PRISM POLE

- Designed for 5/8-11 QuickTip adapters for prism mounting (includes adapter set)
- Twist lock system with built-in 20-min. precise level vial
- The soft rubber knob is easy to tighten and loosen
- Inner aluminum pole with dual graduations: 10ths and metric
- Red/White aluminum outer pole
- Includes 07-2090-50A adapter, 07-2090-135A adapter, carrying case with shoulder strap

| sku | length | inner grads | wgt | mounting type | sect. |
|-------------|----------------|----------------|----------------|---------------|-------|
| 07-4708-TMA | 8.5' (2.6m) | 10ths / metric | 3.1lb (1.4kg) | 5/8-11 | 2 |
| 07-4712-TMA | 11.81' (3.6m) | 10ths / metric | 4.1lb (1.85kg) | 5/8-11 | 3 |
| 07-4715-TMA | 15.25' (4.65m) | 10ths / metric | 6.2lb (2.79kg) | 5/8-11 | 4 |



QuickTip™ Adapter Set



4700-FY SERIES

HI-VIS TWIST LOCK PRISM POLE

- Designed for 5/8-11 QuickTip adapters for prism mounting (includes adapter set)
- Twist lock system with built-in 20-minute precise level vial
- The soft rubber knob is easy to tighten and loosen
- Inner aluminum pole with dual graduations: 10ths and metric
- High-visibility flo-yellow outer pole with anodized gradutions in 10ths
- Includes 07-2090-50A adapter, 07-2090-135A adapter, carrying case with shoulder strap

| sku | length | inner grads | wgt | mounting type | sect. |
|----------------|----------------|----------------|----------------|---------------|-------|
| 07-4708-TMA-FY | 8.5' (2.6m) | 10ths / metric | 3.1lb (1.4kg) | 5/8-11 | 2 |
| 07-4712-TMA-FY | 11.81' (3.6m) | 10ths / metric | 4.1lb (1.85kg) | 5/8-11 | 3 |
| 07-4715-TMA-FY | 15.25' (4.65m) | 10ths / metric | 6.2lb (2.79kg) | 5/8-11 | 4 |

TOPO SHOES FOR PRISM POLES

07-191-A

PRISM POLE TOPO SHOE

- · Precision machined aluminum body with 1" (25.4mm) base
- 5/8-11 female thread
- Height: 3.37 in (85.6mm)
- Weighs: 0.34lb (0.16kg)



07-191-B

PRISM POLE TOPO SHOE

- Aluminum body with 2.5" (64mm) wide base
- 5/8-11 female thread
- Height: 3.37 in (85.6mm)
- Weighs 1.26lb (0.57kg)





QuickTip™Adapter Set



4700-FY SERIES

TWIST LOCK PRISM POLE

- Designed for 5/8-11 QuickTip adapters for prism mounting (includes the adapter set)
- 3-section aluminum pole system
- Twist lock system with built-in 20-minute precise level vial
- Inner aluminum pole with dual graduations: 10ths and metric
- The soft rubber knob is easy to tighten and loosen
- Easily visible precise level vial
- Flo-yellow outer pole with anodized gradutions in 10ths
- Includes 07-2090-50A adapter, 07-2090-135A adapter, carrying case with shoulder strap

| sku | length | inner grads | wgt | mounting type | sect. |
|----------------|---|-------------------|-------------------|---------------|-------|
| 07-4705-TMA-FY | Extended: 4.9' (1.49m) Collapsed: 26-1/4" (67cm) | 10ths / metric | 2.8lb (1.29kg) | 5/8-11 | 3 |



4027

0.7M (2.3') MINI PRISM POLE

- Twist locking mechanism with built-in 20-minute vial
- · 2-section aluminum pole system
- Replaceable hardened point
- Dual graduation: 10ths and metric
- 5/8-11 adjustable QuickTip™ adapter (#07-2090-135A) included
- Extended: 2.3 ft (70cm), collapsed: 19.5 in (50cm)
- Includes carrying case with shoulder strap

| sku | length | inner grads | wgt | mounting type | sections |
|----------------|----------------|-------------------|--------------------|-----------------|----------|
| 07-4027-TMA-FY | 2.3' (0.7m) | 10ths / metric | 1.23lb (0.56kg) | 5/8-11, Adj. | 2 |



4001

MINI STAKEOUT POLE, 1.28 FT

The SitePro mini stakeout pole is only 1.28 ft tall with a 5/8-11 thread fixed tip for prism mounting. Mostly used with a mini prism.

- Built-in 20-minute precise level vial
- One-piece aluminum pole system
- Point can be removed to use as a pole extension, 1-1/4" outside diameter.
- Includes replaceable hardened prism pole point

| SKU | length | wgt | mounting type | sections |
|------------|---------------|----------------|---------------|----------|
| 07-4001-FY | 1.28' (0.39m) | 1.5lb (0.68kg) | 5/8-11, Fixed | 1 |



4047

4.7" MINI HANDHELD ROD

The SitePro mini handheld rod features a 5/8-11 threaded stud with adjustable bubble vial. Use with any prism system that fits the 5/8-11 male thread.

- Height of 4.7" (120mm)
- Built-in adjustable 20-min circular bubble vial
- Removable tip
- · Carrying case not available

| sku | length | material | wgt | mounting type |
|---------|--------------|----------|----------------|------------------|
| 07-4047 | 4.7" (120mm) | Aluminum | 0.4lb (0.18kg) | 5/8-11, Fixed |

90 day guarantee on all poles

18

All SitePro rods and poles include carrying case with carrying strap

Place your company logo and contact on poles. Ask for details.







4602-TM

8.6-FT CARBON FIBER ROBOTIC POLE

Designed to work with the Topcon®-style 360-degree prism and remote control. An essential accessory for the Topcon-style robotic total stations.

- Carbon fiber outer pole, dual graduation (0.01 ft/ 0.1cm); black aluminum inner pole, dual graduation (0.01 ft/ 0.1cm) for direct reading
- Locking pin secures pole to prevent slipping of pole section
- 5/8-11 thread fixed male tip
- Built-in 20-minute bubble vial
- Soft grip twist-lock knob tightens and loosens easily to secure two sections
- Includes 50mm adapter, carrying case

07-4602-TM Dual 4.90 to 8.60 ft (1.52 to 2.60m) Aluminum 5.5-ft, 6.0-ft, 6.5-ft, 7.0-ft, (1.2kg)

THE ULTIMATE TOPOGRAPHIC POLE



QuickTip[™]Set



4626-TM

TOPOGRAPHIC QUICKTIP™ CARBON FIBER PRISM POLE

Lightweight, rugged and weatherproof versatile pole designed for professional surveyors to quickly adapt for GPS, robotic, or total station surveying. Features inner aluminum pole with dual graduations, easy grip twist-lock with locking pin mechanism and QuickTip system.

- Carbon fiber pole with aluminum inner pole, dual graduation (0.01 ft/ 0.1cm)
- Interchangeable QuickTip adapters to achieve correct target height
- Locking pin secures pole to prevent slipping of pole section
- Built-in 20-minute bubble vial
- Soft grip twist-lock knob tightens and loosens easily to secure two sections
- Compatible with most targets, prisms, or GPS antennas
- Includes carrying case, 2090-135A universal adjustable adapter, and 2090-150 GPS mounting adapter

| | grads | lengths | inner pole | locking positions | adapter included | wgt |
|------------|-------|------------------------------------|------------|-------------------------------|------------------|------------------|
| 07-4626-TM | Dual | 1.52 to 2.60m (4.97 to 8.53 ft) | | 1.8 m, 2.0 m, 2.2 m, 2.4 m | , | 2.5lb (1.2kg) |



3812/3912

3.6M RANGE POLE

- Lightweight, 3-section with point
- Available in aluminum or composite with steel point
- 4-ft sections with alternate white & red striping
- Three (3) 1-1/4" (32mm) dia. poles with 5/8-11 male and female thread metal inserts
- Model 3812 includes carrying case and rubber boot

| sku | length | material | locking | wgt | mounting type | sections |
|---------|------------------------|------------------------------|---------|-------------------|----------------------|----------|
| 09-3812 | Fixed, 3.6m (12 ft) | Aluminum Red/White | 5/8-11 | 3.4lb (1.54kg) | 5/8-11, Adj. H.I. | 3 |
| 09-3912 | Fixed, 3.6m (12 ft) | Composite Red/White | 5/8-11 | 2.0lb (0.91kg) | 5/8-11, Adj. H.I. | 3 |


90 day gurantee on all poles

All SitePro rods and poles include carrying case with carrying strap

Option to place your company logo and contact info. Ask for details.

Call: (765) 581-4097 | Fax: (765) 581-4098 | Website: dwsitepro.com

19

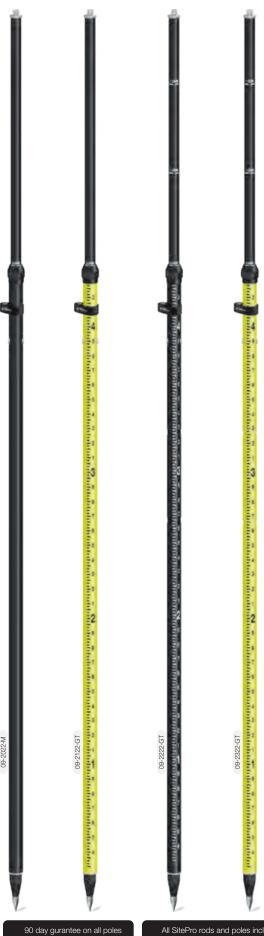




2022

2 METER CARBON FIBER SNAP-LOC **ROVER ROD**

- Snap-loc for non-slip positioning, secures height at 2.0m
- Compression lock mechanism
- On-board 20-minute, adjustable circular vial
- Lightweight telescoping 2-section pole

| SKU | iengin | neignts | material | grads | wgı |
|-----------|--------|-------------------------------------|------------------------|-------|-------------------|
| 09-2022-M | 2.0m | 2m, Collapses to 4.5 ft (1.37 m) | Carbon Fiber, Black | n/a | 1.8lb (0.82kg) |



2122

2 METER ALUMINUM SNAP-LOC **ROVER ROD**

- Snap-loc for non-slip positioning, secures height at 2.0m
- Compression lock mechanism
- On-board 20-minute, adjustable circular vial
- Lightweight telescoping 2-section pole

| | iengin | neignts | material | grads | |
|------------|--------|-------------------------------------|--------------------------|-----------------|-------------------|
| 09-2122-GT | 2.0m | 2m, Collapses to 4.5 ft (1.37 m) | Aluminum, Fluorescent | 10ths 100ths | 2.4lb (1.09kg) |




2222

3-POSITION CARBON FIBER SNAP-LOC GPS ROVER ROD

- Lightweight 2-section telescoping carbon fiber rod
- Snap-loc for no slip with compression lock 3 height positions: 2m, 1.8m or 1.6m and collapses to 4.5 ft (1.37m)
- On-board 20-minute, adjustable circular vial

| SKU | ierigiri | neights | material | graus | wgı |
|------------|----------|---|--------------|-----------------|-------------------|
| 09-2222-GT | 2.0m | 1.6m, 1.8m, 2m; Collapses to 4.5 ft (1.37 m) | Carbon fiber | 10ths 100ths | 1.8lb (0.82kg) |



2300

3-POSITION ALUMINUM SNAP-LOC GPS ROVER ROD

- All-aluminum 2-section telescoping rod
- Snap-loc for no slip with compression lock 3 height positions: 2m, 1.8m or 1.6m and collapses to 4.5 ft (1.37m)
- On-board 20-minute, adjustable circular vial

09-2322-GT 1.6m, 1.8m, 2m; 2.0m Aluminum 10ths 2.2lb Collapses to 4.5 ft (1.37 m) 100ths (0.99kg)

All SitePro rods and poles include carrying case with carrying strap

Option to place your company logo and contact info. Ask for details.

20



Cable Slot



2002 / 2102

2M TWO-PIECE GNSS ROVER ROD

- Available in lightweight carbon fiber or aluminum model
- Model 2102-M features cable slots to protect the connection cable(s)
- Fixed height at two (2) meters
- Built-in on-board 20-minute, adjustable circular vial
- · Easy soft-grip

| sku | length | color | material | mounting type | wgt | sections |
|-----------|--------------------------|------------|--------------|------------------|--------------------|----------|
| 09-2002-M | Fixed 2.0M (6.56 ft) | Black | Carbon fiber | 5/8-11, Fixed | 1.76lb (0.80kg) | 2 |
| 09-2102-M | Fixed 2.0M (6.56 ft.) | Flo-Yellow | Aluminum | 5/8-11, Fixed | 4.0lb (1.81kg) | 2 |



100 SERIES

GPS ANTENNA TRIPOD

The SitePro 100S GPS antenna tripod, ideal for GPS and machine-control applications, features aluminum construction with extendable tripod legs and 2 meter center staff with twist-lock mechanisms.

- Center staff rotates 360° to check calibration of plumb
- Built-in 8-minute bubble vial
- 3-position center staff with steel locking pin – adjusts to 3 heights: 2.0m, 1.8m, 1.5m
- Lightweight, heavy duty aluminum legs and staff are electrostatically powdercoated in flo-lime paint
- Aluminum hardware is anodized black
- Large attachable soft-turf spurs (included) for more grip to maximize
- stability in soft-ground applications and prevent twisting, ideal when using angle measuring instruments such as robots
- Built-in compass with 8 minute vial
- Removable 5/8-11 threaded head adapter
- · Replaceable points
- Includes LGSPUR Soft-Turf Spur Set, 21-81540 heavy bag



SPURS

Large spur (included) attaches to add grip to maximize stability in softground applications



| | locking type | center locking | open | collapsed | |
|------------|--------------|------------------|----------------|----------------|-----------------|
| 09-100S-FY | Twist Lock | 2.0m, 1.8m, 1.5m | 79" (201cm) | 50" (127cm) | 15lb (6.8kg) |



Open-Top Clamping System

4250

THUMB-RELEASE TRIPOD WITH TOP ENTRY

- Tripod creates free-standing setup for GNSS antenna poles or prism poles.
- Top mount universal head will accommodate 1 to 1.25 inch diameter
- Features large, thumb release buttons for quick setup on even or uneven ground
- Impact resistant materials, replaceable shoes, and quick release telescoping aluminum legs
- Legs extend independently up to 6-ft (180cm)
- Fine adjustment knob for fine tuning your setup
- Includes carrying case

| sku | | color | style | open | collapsed | wgt |
|---------|----------|------------|------------------|----------------|--------------------|-------------------|
| 07-4250 | Aluminum | Flo-Yellow | Thumb Release | 71" (180cm) | 42-1/2" (108cm) | 6.0lb (2.72kg) |





- Open-Side Clamping System
- Anti-Crushina
- Fits 1" to 1.5" Poles

4260

V-SERIES ANTI-CRUSH THUMB-RELEASE BIPOD

The SitePro 4260 is designed to provide non-slip grip while preventing user from over-tightening clamp and crushing the prism pole. Used by a surveyor to set up a freestanding GPS antenna pole or prism pole. Easy grip twist-lock for securing

- Side-entry head with open clamp for quick and easy pole setup
- Reinforced feet with replaceable
- Unique locking system provides nonslip quick clamping
- · Easily adjust height of legs independently with thumb release push buttons
- Fits 1" to 1-1/2" (25mm-38mm) diameter poles
- Includes velcro strap to secure legs during transport

| -1 | sku | type | color | style | fits (pole diameter) | | closed | |
|----|---------|----------|------------|--------------------------|-----------------------------|--------------------|---------------------|-------------------|
| | 07-4260 | Aluminum | Flo-Yellow | Open-Side, Anti-Crush | 1" to 1-1/2" (25mm-38mm) | 71-1/2" (182cm) | 42-1/2"" (108cm) | 4.3lb (1.95kg) |



Open-Face Clamping System

- Anti-Crushina
- Fits 1" to 1.5" Poles

4364


ANTI-CRUSH

ALUMINUM ANTI-CRUSH THUMB-RELEASE **BIPOD**

The SitePro 4364 is designed to provide non-slip grip while preventing user from over-tightening clamp and crushing the prism pole. Used by a surveyor to set up a freestanding GPS antenna pole or prism pole. Fits 1 to 1.25 inch (25.4 to 32mm) outside diameter poles easily through the open-face head with anti-crush clamp. 1.5-in (38mm) poles can be attached easily through the top of the open face clamp.

- Open-face head with anti-crush clamp for quick and easy pole setup
- Unique anti-crush locking system provides non-slip quick clamping
- Fits 1" to 1-1/2" (25mm-38mm) diameter poles
- · Easily adjust height of legs independently with thumb release push buttons
- Replaceable points
- Includes velcro strap to secure legs during transport

| sku | type | color | style | fits (pole diameter) | open | closed | wgt |
|------------|----------|------------|--------------------------|-----------------------------|-------------|-------------|-------------------|
| 07-4364-FY | Aluminum | Flo-Yellow | Open-Face, Anti-Crush | 1" to 1-1/2" (25mm-38mm) | 71" (182cm) | 42" (108cm) | 4.7lb (2.13kg) |



Open-Side Clamping System

Fits 1" to 1.5" Poles

4360

ALUMINUM THUMB-RELEASE BIPOD

Easily set up a freestanding GPS antenna pole or prism pole. Fits 1 to 1.25 inch (25.4 to 32mm) outside diameter poles easily through the side entry head with open clamp. 1.5-inch (38mm) poles can be attached easily through the top of the open clamp.

- · Side-entry head with open clamp for quick and easy pole setup
- Unique locking system provides nonslip quick clamping
- Easily adjust height of legs independently with thumb release push buttons
- Fits 1" to 1-1/2" (25mm-38mm) diameter poles
- Replaceable points
- Includes velcro strap to secure legs during transport

| | sku | type | color | style | fits (pole diameter) | open | closed | wgt |
|------------|-----------|----------|------------|-----------|-----------------------------|-------------|-------------|-------------------|
| 07-4360-FY | | Aluminum | Flo-Yellow | Open-Side | 1" to 1-1/2" (25mm-38mm) | 71" (182cm) | 42" (108cm) | 4.7lb (2.13kg) |
| | 07-4360-Y | Aluminum | Yellow | Open-Side | 1" to 1-1/2" (25mm-38mm) | 71" (182cm) | 42" (108cm) | 4.7lb (2.13kg) |

All SitePro bipods include carrying bag with shoulder strap

Option to place your company logo and contact info. Ask for details.



ANTI-CRUSH





- Open-Face Clamping System
- Anti-Crushing
- Fits 1" to 1.5" Poles

4365

ANTI-CRUSH THUMB-RELEASE BIPOD

The SitePro 4365 is constructed of carbon fiber and used to quickly set up a freestanding GPS antenna pole or prism pole.

- Open-face head with anti-crush clamp for quick and easy pole setup
- · Unique locking system provides nonslip quick clamping
- Fits 1.0 to 1.5-in (25.4 to 38mm) outside diameter poles easily through the open-face entry head
- Easily adjust height of legs independently with thumb release push buttons
- · Replaceable points
- · Includes velcro strap to secure legs during transport

| 07-4365 | Carbon Fiber | Black | Open-Face, Anti-Crush | 1" to 1-1/2" (25mm-38mm) | 71-1/2" (182cm) | 42-1/2" (108cm) | 4.1lb (1.86kg) |
|---------|--------------|-------|--------------------------|-----------------------------|--------------------|--------------------|-------------------|
| | | | | | | | |



- Open-Side Clamping
- Fits 1" to 1.5" Poles

4360-05

THUMB-RELEASE MINI BIPOD

This Mini Bipod utilizes the same style as the 07-4360 series bipod, but shorter.

- Fits 1.0 to 1.5-in (25.4-to-38mm) diameter poles attach easily through the open clamp
- 1.5 inch (3.81cm) outside diameter poles can be loaded through the top
- Collapses to 25 inches (63.5cm) and extends to 35 inches (88.9cm)
- · Replaceable points

| sku | | color | style | fits (pole diameter) | open | closed | wgt |
|---------------|----------|------------|-----------|-----------------------------|---------------|---------------|------------------|
| 07-4360-05-FY | Aluminum | Flo-Yellow | Open-Side | 1" to 1-1/2" (25mm-38mm) | 35" (90cm) | 25" (64cm) | 3.5lb (1.6kg) |



- Open-Side Clamping
- Fits 1" to 1.5" Poles

4160

FIXED MINI PRISM POLE BIPOD

A simple mini bipod, ideal for use with poles under 24-in (61cm) long. The legs are a fixed length of 10-inches (25cm) each.

- · Side-entry head with open clamp for quick and easy pole setup
- Fits 1.0 to 1.5-in (25.4-to-38mm) diameter poles attach easily through the open clamp
- Unique locking system provides nonslip quick clamping
- · Legs are made of solid aluminum at a fixed height of 10-in (25cm)

| sku | type | color | style | fits (pole diameter) | open | closed | wgt |
|---------|----------|-------|--------------|-----------------------------|---------------|--------|-------------------|
| 07-4160 | Aluminum | Black | Fixed Height | 1" to 1-1/2" (25mm-38mm) | 10" (25cm) | n/a | 0.8lb (0.36kg) |

2090 SERIES

QUICKTIP™ POLE ADAPTERS

- · Precision machined aircraft aluminum
- 5/8-11 male pole mounting thread
- Compatible with the QuickTip™ series poles and other prism poles with this type of interchangeable design
- · Adapters length is designed to achieve 150mm target height



| 07-2 | 07-20 | | |
|-------------|----------------------------|---------------|-------------|
| sku | target(s) designed for | target height | adapter 'L' |
| 07-2090-35 | SitePro 2010M | 115mm | 35mm |
| 07-2090-50 | GPH1, SitePro 03-3024 86mm | | 50mm |
| 07-2090-50A | Zeiss 360° Prism, CST 1010 | 100mm | 50mm |
| 07-2090-73 | TopCon 360 Prisms | 77mm | 73mm |











150 mm



HEIGHT OF


LENGTH



5100 SERIES POLE EXTENSIONS, **ALUMINUM**

The 5100 Series aluminum pole extensions have 5/8-11 female threads on the bottom and 5/8-11 male threads on the top to allow more added sections.

- 1.25" (32mm) outside diameter
- · High-visibility flo-yellow
- · Various sizes available



| sku | length | type | weight |
|------------|--------|----------|-----------------|
| 07-5130-FY | 1-ft | Aluminum | 1.00lb (0.45kg) |
| 07-5143-FY | 1M | Aluminum | 1.30lb (0.59kg) |
| 07-5144-FY | 50cm | Aluminum | 1.00lb (0.45kg) |
| 07-5145-FY | 25cm | Aluminum | 0.90lb (0.41kg) |

07-2131

ADAPTER 5/8 FEMALE TO 1/4 MALE

NEW!

- Features 5/8-11 female to 1/4-20 male
- Weighs 0.17lb (0.08kg))



NEW!

07-5180

ADAPTER DOUBLE MALE

- 5/8-11 double male adapter
- Weighs 0.08lb (0.04kg)

07-5181

ADAPTER DOUBLE FEMALE

- 5/8-11 double female adapter

Weighs 0.08lb (0.04kg)

07-2090-012

ADAPTER GPS QUICK-RELEASE TIP

- · Quick-release Swiss-style tip
- Male 5/8-11 threads
- Weighs 0.08lb (0.04kg)



07-2080

SNAP-ON TYPE PRISM ADAPTER

- · Adapter for Swiss-style snap-on prisms
- Mounts to 5/8-11 tribrach adapter or prism pole
- Weighs 0.06lb (0.03kg)

09-114-10

NEW!

TRIPLE MAGNET MOUNT FOR TRIMBLE R10

- · Light-weight magnetic bracket for GNSS antennas on the roof of vehicles
- · Spring design for greater flexibility
- Three (3) very strong 4.5" (115mm) diameter magnets to ensure a stable position of the antenna
- 5/8-11 thread connector for mounting GNSS antenna
- 6.375 inches (162mm) in height
- Includes mount and extra-tall adapter
- Weighs 3.75lb (1.70kg)

NEW!

09-114-050

SINGLE MAGNETIC MOUNT WITH 5/8-11 TIP

- Strong magnetic base with 3.5-in (90mm) diameter
- 5/8 x 11 tip

Weighs 1.17lb (0.53kg)

07-2072-31

TILT MONUMENT MOUNT FOR 2-IN PIPE

- Adjustable tilt monument mount for 2-inch pipe with MPT 2 x 11-1/2 TPI
- The adapter has 3.20-inch (8.19cm) diameter and overall height of 3.036 inches (7.71cm)
- Includes a removable brass 5/8 x 11 male stud that is adjustable in azimuth and held in location by two set screws
- The adapters are leveled by three screws with a tilt range +/- 7°
- The height above the pivot point to the stud shoulder is 1.37 inches (3.50cm)
- The height below the brass 5/8 stud to the shoulder is 0.463 inches (1.18cm)
- The axis height is engraved on the outside of the monument
- Weighs 6.80lb (3.08kg)

07-191-A

PRISM POLE TOPO SHOE

- Precision machined aluminum body with 1" (25.4mm) base
- 5/8-11 female thread
- Height: 3.37 in (85.6mm); Weighs: 0.34lb (0.16kg)



07-191-B

PRISM POLE TOPO SHOE

- Aluminum body with 2.5" (64mm) wide base
- 5/8-11 female thread
- Height: 3.37 in (85.6mm); Weighs 1.26lb (0.57kg)







07-2090-76

GPS QUICK-DISCONNECT 76.2MM ADAPTER

- Anodized aluminum adapter with leica-style connector on the bottom, 5/8-11 thread on the top
- Can be combined with #2090-24 for quick release adapter
- Adds* 76.22mm to GNSS or prism pole
- Weighs 0.14lb (0.06kg)



07-2090-24

GPS QUICK-RELEASE ADAPTFR

- Anodized aluminum adapter with female 5/8-11 thread on the bottom, leica-style connector on the top
- Adds* 24mm to your GNSS or prism pole length
- Weighs 0.05lb (0.02kg)

*Note: consider heights in your software or when post-processing your data in the office.



5200 SERIES

OCP SERIES

performance

competitor's cradles

rods

10-5194

SUREGRIP QUICK RELEASE CRADLES

The SureGrip quick release cradles feature a clamping system that easily secures data collector/controller without crushing it.

- Anti-crush quick release design locks cradle securely when tightened
- · Plugs directly into quick-release pole clamps
- Easily secures data collector/controller with anti-crush quick release design that locks cradle when tightened
- · Durable anodized aluminum design

| item | designed to fit | wgt |
|----------|-------------------|-----------------|
| 10-52139 | Ranger 7™, TSC 7™ | 0.55lb (0.25kg) |
| 10-5265 | TSC3 | 0.46lb (0.21kg) |



Design Your Own Custom Solution for Securing Your Data Collector or Controller.



OPEN CLAMP BRACKETS

· Made of aluminum for durability and

· Designed for efficient mounting to poles and

· Quick-release button allows a quick-release

cradle to rotate in a comfortable position


Compatible with SureGrip and most

Compass



QR SERIES

QUICK RELEASE CLAMPS



- Ideal for RTK and GNSS surveys requiring a pole and a data collector
- Made of anodized aluminum for durability and performance
- Compatible with most popular quick-release cradles to hold data controllers

| sku | description | fits (dia.) |
|----------|--|-------------------|
| 10-5215 | QR Pole Clamp | 1.25-in (32mm) |
| 10-5215X | QR Pole Clamp w/20-min Vial & Compass | 1.25-in (32mm) |
| 10-52154 | QR Pole Clamp with Compass | 32mm (1.25-in) |

10-52805

BAS SERIES

BALL & SOCKET SYSTEMS

- Ball and socket link system is designed to allow versatile positioning of the controller position on the pole
- Easily secures data collector/controller with anti-crush quick release design that locks cradle when tightened
- Quick-release pole clamp
- Durable anodized aluminum design

| sku | description | fits (dia.) |
|----------|----------------|---------------------------|
| 10-52160 | BAS Pole Clamp | 1.25-in (32mm) |
| 10-52201 | BAS Link | 1-in (25.4mm) Ram Ball |

25

10-5198 OCP Bracket with 0.15 x 0.92" Slot for Radio (38mm) 1.5-in (38mm) 10-5199 OCP Bracket with 0.15 x 0.92" Slot for Radio (32mm) 1.25-in (32mm)

OCP Bracket with

1.25-in

(32mm)

11-750

ROD LEVEL

- Fits round or rectangular rods for quick setup of your leveling rod with convenience
- · Strong die-cast aluminum housing and adjustable vial
- Strong aluminum housing, quickly level your leveling rod with convenience
- Large, easy to read 30-min bubble vial
- · Works with all leveling staffs and prism poles
- · Mounting hardware included



11-751 HEADS UP ROD LEVEL

- Specially designed for safety while performing routine surveys in traffic areas
- Clamps onto a rod up to 1.25-in (32mm) diameter and allows user to simply look through the side window to check level while keeping partner in sight
- Twist lock knob for clamping to rod or pole
- 20-min bubble vial for accurate and quick setup
- Special mirror allows for direct reading of adjustable circular bubble

ELEVATOR TRIPODS

FGC20ELAZ

ELEVATOR COMPOSITE TRIPOD

The FGC20 is a medium duty fiberglass tripod with positive locking quick clamp style clamps. Adjustable center column with height adjustment range of 20" (51cm) and metal gear & rack system for smooth continuous motion.

- · Double banded extension legs and large positive locking quick clamp for extra stability
- · Precision machined aluminum head and leg hinges provides stable mounting base
- · Die-cast aluminum shoe with hardened steel replaceable shoe points
- Powder coated castings for durability and wear-resistance
- Includes: heavy-duty poly-webbing shoulder strap

| 01-FGC20ELAZ-B | 93" | 48" | Quick | 5/8-11, | 15lb |
|----------------|---------|---------|-------|-----------|---------|
| | (2.36m) | (1.22m) | Clamp | Flat Head | (6.7kg) |

FGH30ELAZ

ELEVATOR COMPOSITE TRIPOD

The FGHD30 elevator tripod is a heavy duty with dual clamp design for added extra stability - both positive locking quick clamp and wing screw. Tall adjustable center column with height adjustment range up to 44" (112cm) and metal gear & rack system for smooth continuous motion.

- · Double banded extension legs and large positive locking quick clamp for extra
- · Precision machined aluminum head and leg hinges provides stable mounting base
- Die-cast aluminum shoe with hardened steel replaceable shoe points
- Powder coated castings for durability and wear-resistance
- Includes: heavy-duty poly-webbing shoulder strap

| SKU | extend | collapse | ciamping | nead Style | wgt |
|------------------|-------------------|----------------|---------------|----------------------|----------------|
| 01-FGH30ELAZ-DCB | 12' 8" (3.86m) | 72" (1.82m) | Dual Clamp | 5/8-11, Flat Head | 33lb (15kg) |
| | | | | | |



26





Option to apply your company logo and contact info. Ask for details.

RHIVIZ20-B

SALAMANDER ROBOTIC COMPOSITE TRIPOD

- · Ideal for robotic total stations and laser scanners or construction lasers where accuracy is important
- . Meets ISO standard (12858-2-H)
- Tongue-groove strut and legs for stability and accurate performance
- Heavy duty dual clamp design adds extra stability - both quick clamp & wing screw
- Double banded extension legs and large positive locking quick clamp add stability
- Ergonomic hand carrying handle

- Large 6-5/8-in (17cm) precision machined flat head with large 2-3/8-in (6cm) center hole for easy set-up over a point
- · Large foot pad for solid planting and improves stability on any terrain
- Replaceable shoe points
- Built-in retainer support tabs for adding support system to prevent leg kick out
- · Includes heavy-duty poly-webbing shoulder strap, retainer strap, head protective cap, adjustment tool

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|---------------|----------------|-------------------|------------|----------------------|-------------------|----------|
| 01-RHIVIZ20-B | 70" (180cm) | 44.75" (114cm) | Dual Clamp | 5/8-11, Flat Head | 17.8lb (8.1kg) | Black |

SHIVIZ20-B

SALAMANDER SURVEYOR COMPOSITE TRIPOD

- Ideal for both land surveying and precision Precision machined flat head with center construction instruments
- Large hand grip, quick clamp lock type
- Durable all composite legs and struts with powder coated wear-resistant metal hardware
- Double banded extension legs and large positive locking quick clamp
- hole for easy set-up over a point
- · Precision machined aluminum head and leg hinges provides stable mounting base
- · Die-cast aluminum shoe with hardened steel replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap for ease of carrying to the

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|---------------|----------------|-------------------|-------------|----------------------|-------------------|----------|
| 01-SHIVIZ20-B | 70" (180cm) | 44.75" (114cm) | Quick Clamp | 5/8-11, Flat Head | 16.6lb (7.5kg) | Black |

VHIVIZ20-B

SALAMANDER CONTRACTOR COMPOSITE TRIPOD

- Ideal for both optical and laser construction instruments
- · Medium weight fiberglass tripod
- Large hand grip, quick clamp lock type
- Powder coated wear-resistant metal hardware
- Double banded extension legs and large positive locking quick clamp
- · Precision machined aluminum head and leg hinges provides stable mounting base
- · Die-cast aluminum shoe with hardened steel replaceable shoe points
- · Includes heavy-duty poly-webbing shoulder strap for ease of carrying to the iob site

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|---------------|----------------|-------------------|-------------|----------------------|-------------------|----------|
| 01-VHIVIZ20-B | 70" (180cm) | 44.75" (114cm) | Quick Clamp | 5/8-11, Flat Head | 16.0lb (7.2kg) | Black |

ALHVZ20

SALAMANDER CONTRACTOR ALUMINUM TRIPOD

- · Ideal for both optical and laser construction instruments
- Medium weight, heavy gauge aluminum with added stability of double banded legs
- Positive locking quick release clamps
- · Powder coated wear-resistant metal hardware
- · Die-cast aluminum shoe with hardened steel replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap

| SKU | extended | collapsed | ciamping | nead style | net wgt | naroware |
|------------|----------------|----------------|-------------|----------------------|-----------------|----------|
| 01-ALHVZ20 | 64" (163cm) | 40" (102cm) | Quick Clamp | 5/8-11, Flat Head | 10lb (4.6kg) | Black |



HVFG-DC

SITEMAX™ LARGE HEAD COMPOSITE TRIPOD WITH DUAL-CLAMP

The SiteMax HVFG is the best value heavy duty fiberglass tripod on the market. Heavy duty dual clamp design add extra stability - both quick clamp and wing screw. Large round head is precision machined to add even more stability for your instrument.

- Powder coated wear-resistant metal hardware
- Double banded extension legs and large positive locking quick clamp add stability
- Replaceable shoe points
- Ergonomic hand carrying handle
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|---------------|----------------|----------------|---------------|----------------------|-----------------|----------|
| 01-HVFG20-DCB | 72" (183cm) | 47" (119cm) | Dual Clamp | 5/8-11, Flat Head | 18lb (8.2kg) | Black |

WDF20-DC

WOOD/COMPOSITE TRIPOD, DUAL CLAMP

- The best value heavy duty wood/ composite tripod on the market
- Heavy duty clamp design add extra stability - quick clamp and dual-clamp with wing screw available
- Combination of hardwood legs with fiberglass dowels provides stability and weather resistance
- Double banded extension legs and large positive locking quick clamp add extra stability
- Powder coated wear-resistant metal hardware
- · Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|--------------|----------------|----------------|---------------|----------------------|-----------------|----------|
| 01-WDF20-DCB | 72" (183cm) | 42" (107cm) | Dual Clamp | 5/8-11, Flat Head | 16lb (7.2kg) | Black |

WDF20

WOOD/COMPOSITE TRIPOD, QUICK CLAMP

- Heavy duty quick clamp design add extra stability
- Combination of hardwood legs with fiberglass dowels provides stability and weather resistance
- Double banded extension legs and large positive locking quick clamp add extra stability
- Powder coated wear-resistant metal hardware
- · Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

| sku | extended | collapsed | clamping | | | |
|------------|----------------|----------------|----------------|----------------------|-----------------|-------|
| 01-WDF20-B | 72" (183cm) | 42" (107cm) | Quick Clamp | 5/8-11, Flat Head | 16lb (7.2kg) | Black |

WDW20

WOOD TRIPOD, WING SCREW

The WDW tripod is made of high quality hardwood with wide-frame extension legs and 1" diameter dowels. Designed to absorb and dampen vibration which adds stability for your instrument

- Large aluminum head and leg hinges provide stable mounting base
- Wing screw style clamp with die cast aluminum hardware for maximum stability
- Wear-resistant with treated finish and powder coated metal hardware
- Aluminum shoe with hardened steel replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|--------------|----------------|----------------|---------------|----------------------|-----------------|----------|
| 01-WDW20HV-0 | 72" (183cm) | 42" (107cm) | Wing Screw | 5/8-11, Flat Head | 16lb (7.2kg) | Orange |





ALQR20-DC

HEAVY-DUTY ALUMINUM TRIPOD, **DUAL CLAMP SYSTEM**

The ALQR Series tripods are made of medium weight, heavy gauge aluminum with added stability of double banded legs.

- Positive locking quick release clamps
- Powder coated wear-resistant metal hardware
- · Replaceable shoe points
- · Includes heavy-duty poly-webbing shoulder strap

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|---------------|----------------|----------------|---------------|----------------------|-----------------|----------|
| 01-ALQR20-DCB | 64" (163cm) | 40" (102cm) | Dual Clamp | 5/8-11, Flat Head | 10lb (4.6kg) | Black |

ALQR20

ALUMINUM TRIPOD WITH QUICK RELEASE

The ALQR Series tripods are made of medium weight, heavy gauge aluminum with added stability of double banded legs.

- · Positive locking quick release clamps
- Powder coated wear-resistant metal hardware
- · Replaceable shoe points
- · Includes heavy-duty poly-webbing shoulder strap

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|-------------|----------------|----------------|----------------|----------------------|-----------------|----------|
| 01-ALQR20-B | 64" (163cm) | 40" (102cm) | Quick Clamp | 5/8-11, Flat Head | 10lb (4.6kg) | Black |
| 01-ALQR20-0 | 64" (163cm) | 40" (102cm) | Quick Clamp | 5/8-11, Flat Head | 10lb (4.6kg) | Orange |

ALQR40

DOMED-HEAD ALUMINUM TRIPOD

The ALQR Series tripods are made of medium weight, heavy gauge aluminum with added stability of double banded legs.

- · Circular dome head for fast setup with compensated instruments and lasers
- · Positive locking quick release clamps
- Powder coated wear-resistant metal hardware
- · Replaceable shoe points
- Includes: heavy-duty poly-webbing shoulder strap

| sku | | collapsed | clamping | head style | net wgt | |
|-------------|----------------|----------------|----------------|----------------------|-----------------|-------|
| 01-ALQR40-B | 64" (163cm) | 40" (102cm) | Quick Clamp | 5/8-11, Dome Head | 10lb (4.6kg) | Black |



EASY COLLAPSE & CARRY

Carrying your tripod to and from the jobsite with other gear or tools can be cumbersome. The heavy duty poly-webbed shoulder strap makes it easier.

Strap is included with all SitePro Tripods and has built-in webbed belt with locking clip to secure leas of tripod.





ALW20

ALUMINUM TRIPOD WITH WING SCREW

The ALW20 is a heavy duty, aluminum tripod with wing screw clamps.

- Aluminum hinge, clamp and shoe castings Powder coated castings for durability and
- · Replaceable shoe points
- wear-resistance
- Includes heavy-duty poly-webbing shoulder strap

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|------------|----------------|----------------|---------------|----------------------|-----------------|----------|
| 01-ALW20-B | 65" (165cm) | 42" (107cm) | Wing Screw | 5/8-11, Flat Head | 10lb (4.6kg) | Black |

ALW10

ALUMINUM MINI-TRIPOD WITH WING SCREW

The ALW10 tripod has a small footprint, yet heavy duty and sturdy. Features standard head with wing screw clamps.

- · Aluminum hinge, clamp and shoe castings
- · Replaceable shoe points
- · Powder coated castings for durability and wear-resistance
- · Includes carrying strap and adjustment

| sku | extended | collapsed | clamping | head style | net wgt | hardware |
|------------|-----------------|------------|---------------|----------------------|------------------|----------|
| 01-ALW10-B | 28.5" (73cm) | 22" (56cm) | Wing Screw | 5/8-11, Flat Head | 6.4lb (2.9kg) | Black |

ALC20

ALUMINUM TRIPOD WITH QUICK CLAMP

The ALC is a lightweight, aluminum contractors' tripod with positive locking quick clamp style clamps and individually tightened hinge screws.

- Aluminum hinge, clamp and shoe castings with replaceable shoe points
- · Powder coated castings for durability and wear-resistance
- Includes heavy-duty poly-webbing shoulder strap

| sku | extended | collapsed | clamping | head style | net wgt | hardwa |
|------------|----------------|------------|----------------|----------------------|------------------|--------|
| 01-ALC20-B | 65" (165cm) | 39" (99cm) | Quick Clamp | 5/8-11, Flat Head | 9.0lb (4.1kg) | Black |

01-TLS

TRIPOD RETAINER STRAP


- Use with tripods with clamp lock holder on legs
- Fixes the legs in place to maintain stability while you work
- Use with SitePro model RHIVIZ20 and HVFG-DC





01-TFG2

TRIPOD FLOOR GUIDE



extend and stabilize tripod legs to 25-375" (65cm) from center; additional slots to extend 14" (35.6cm) from center

for points and rubber straps



01-AI W20-B

30



SPR-SERIES

SURVEYOR'S FIBERGLASS GRADE ROD

Our most popular rods designed for surveyors, the SitePro SPR-Series leveling rods are constructed of durable, rigid fiberglass with reinforced ribs for strength and stability. Lightweight, telescoping rectangular-oval shaped sections make the SPR-Series leveling rod easier to grip and allows for widened easy-to-read scales. Granduated scales are glare-resistant with formulated coating that protects the scales from wear.

- Reliable, long-lasting spring-loaded round buttons provide tight, secure, locking of the sections, and designed to resist jamming from debris
- Special backside measuring scale allows users to read overall height measurements at eye level
- 1/4-20 female adapter in top section for mounting prism
- Reliable, long-lasting spring-loaded round buttons provide tight, secure, locking
 Non-conductive fiberglass is water-proof and corrosion-resistant
 - Glare resistant, easy-to-read graduations and a special measuring scale on the backside, suitable for many clearance and height measurements
 - · Sections are removable for easy cleaning
 - · Includes carrying case



MOUNTING TIP FOR MINI PRISM

Top section of leveling rod has built-in 1/4-20 female thread, idea of mounting a mini prism



RELIABLE, SPRING LOADED BUTTONS

Section buttons are round to provide tight, secure, locking of the sections, and designed to resist jamming from debris.

| sku | length | graduations | sections | collapsed | wgt |
|------------|--------|---------------|----------|--------------------|-------------------|
| 11-SPR17-T | 17-ft | 10ths/100ths | 5 | 48-in (122cm) | 5.00lb (2.3kg) |
| 11-SPR17-C | 17-ft | Inches/8ths | 5 | 48-in (122cm) | 5.00lb (2.3kg) |
| 11-SPR25-T | 25-ft | 10ths/100ths | 6 | 58.5-in (149cm) | 6.00lb (2.3kg) |
| 11-SPR25-C | 25-ft | Inches/8ths | 6 | 58.5-in (149cm) | 6.00lb (2.3kg) |
| 11-SPR07-M | 7.6m | Metric "E",mm | 6 | 58.5-in (149cm) | 6.00lb (2.3kg) |







75 74 63 62 49 11-SPR07-M BACK :37 25 23 22: E

Call: (765) 581-4097 Fax: (765) 581-4098 Website: dwsitepro.com

31

SCR-SERIES

CONSTRUCTION FIBERGLASS GRADE ROD

The SitePro SCR-Series leveling rods are constructed of durable corrosion-resistant and nonconductive fiberglass. Lightweight, telescoping rectangular shaped sections with rounded back corners make the SCR-Series leveling rod easier to grip.

Features stand-off ribs on front corners to protect the large, easy-to-read graduated scale from wear. Scales are glare-resistant with formulated coating that protects the scales from wear.

- Reliable, long-lasting spring-loaded Delrin® buttons securely lock sections together, and designed to resist jamming from debris
- Special backside measuring scale allows users to read overall height measurements at eye level
- Rectangular shape allows for laser detector clamp to mount to any section of the leveling rod
- Non-conductive fiberglass is water-proof and corrosion-resistant
- Sections are removable for easy cleaning

| | | | | | | | -3 -2 -1 | -2 1 | FRONT | 3 2 1 1 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | FRONT | 39 3 | H |
|------------|-------|---------------------|------------|--------------------|------------------|-----------------------|------------------|------------------|--------------------------------------|---|------------------|-------------|---------------|
| 11-SCR13-C | 13-ft | graduations 8ths | sections 4 | 58-in (148cm) | 4.5lb (2.0kg) | | 36 | 16 | THE STREET HOME | 17 | 11-SCR25-T FRONT | | THEODE MEDONE |
| 11-SCR13-T | 13-ft | 100ths | 4 | 58-in (148cm) | 4.5lb (2.0kg) | SONT | 1 LINOS | 1 INO | 17 | -2 | | E29 | |
| 11-SCR16-C | 16-ft | 8ths | 5 | 57-in (145cm) | 6.2lb (2.8kg) | 11.5CR13-C FONT | 11-SCR16-C FRONT | 11-SCR16-T FRONT | | 13 | | - | |
| 11-SCR16-T | 16-ft | 100ths | 5 | 57-in (145cm) | 6.2lb (2.8kg) | | =10 | 8 | 3 2 1 1 1 1 1 1 | 9 9 | | 19= | |
| 11-SCR25-C | 25-ft | 8ths | 6 | 63.5-in (161cm) | 10lb (4.5kg) | En E8 | Eg . | -8 -7 | | ₹8 | | | |
| 11-SCR25-T | 25-ft | 100ths | 6 | 63.5-in (161cm) | 10lb (4.5kg) | = 8 = 8 | -8 -7 | 6 | 9 | В | | # | |
| 11-SCR05-M | 5m | Metric 'E' | 5 | 57-in (145cm) | 6.2lb (2.8kg) | F7 F5 | -6 | 5 | E 10 | 7 | | E10 | |
| | | | | | | 5 4 | =5 | -4 | | -5 | | - | |

CONSTRUCTED

DURABLE, RIGID FIBERGLASS WITH REINFORCED DESIGN FOR STRENGTH & STABILITY



MOUNTING TIP FOR MINI **PRISM**

Section buttons are round to provide tight, secure, locking of the sections, and designed to resist jamming from debris.



GRADUATED IMPRINTED BACKSIDE

Special backside measuring scale allows users to read overall height measurements at eye level



SCR-Series include carrying case with carrying strap

11-8 SERIES

ALUMINUM LEVELING RODS

The SitePro telescoping aluminum leveling rod are constructed with durable, lightweight aluminum alloy that allows smooth extension and prevents unnecessary clattering.

The 11-8 series are imprinted with weather and corrosionresistant inks. The telescoping sections are injection molded section joints and capped with secure high strength buttons.

- · Lightweight and durable telescoping aluminum leveling rods
- · Heavy duty aluminum wall thickness
- Easy-to-read graduations with measuring scale on the backside for direct reading at eye level
- Three different unit of measure are available, see graduations: 8ths, 100ths, and Metric
- · Includes leveling bubble vial attachment and carrying case



SNAP-IN PUSH BUTTON

High strength push-buttons with injection molded section joints for secure locking of telescopic sections.





ATTACHABLE ROD LEVEL

Bubble Vial Attachment easily clips into slot for quick leveling of aluminum rods.

INCLUDES CARRYING CASE

All SitePro 11-8 series aluminum rods include carrying case with accessory pouch and shoulder strap.

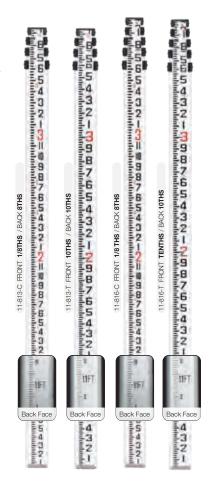

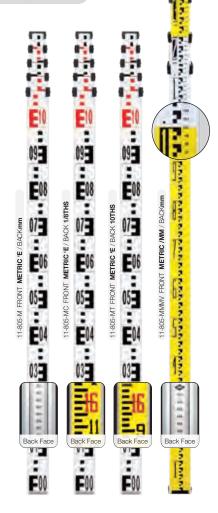

| sku | length | graduations - front face | graduations -back face | sections | collapsed | wgt |
|-------------|-------------|---------------------------|------------------------|----------|------------------|------------------|
| 11-813-C | 13-ft | Feet Inches/8ths | Feet Inches/8ths | 4 | 47-in (119cm) | 3.0lb (1.4kg) |
| 11-813-T | 13-ft | Feet 10ths/100ths | Feet 10ths/100ths | 4 | 47-in (119cm | 3.0lb (1.4kg) |
| 11-816-C | 16-ft | Feet Inches | Feet Inches/8ths | 5 | 48-in (123cm) | 3.5lb (1.6kg) |
| 11-816-T | 16-ft | Feet 10ths/100ths | Feet 10ths/100ths | 5 | 48-in (123cm) | 3.5lb (1.6kg) |
| 11-805-M | 5m | Metric "E" | Metric mm | 5 | 48-in (122cm) | 3.5lb (1.6kg) |
| 11-805-MC | 5m 16-ft | Metric 'E' Feet Inches | Feet Inches/8ths | 5 | 48-in (122cm) | 3.5lb (1.6kg) |
| 11-805-MT | 5m 16-ft | Metric 'E' Feet Tenths | Feet 10ths/100ths | 5 | 48-in (122cm) | 3.5lb (1.6kg) |
| 11-805-MMMV | 5m | Metric, 1/2cm,mm | Metric 1/2cm,mm | 5 | 122cm (48-in) | 1.6kg (3.5lb) |

11-TURTL


5-IN LEVELING ROD TURNING PLATES

This turning plate is used to improve the accuracy of level runs in soft terrain. The leveling plates (or Turtles as they are commonly known) are cast heavy steel and red.

- Heavy cast steel is powder painted for durability and longevity
- · Handle with ground points
- Dome is 1.2-in (3.0cm) half ball;
 Diameter: 5-in (12.7cm)
- Height of foot to top of half ball: 2.75-in (7cm); Weight: 6.6lb (3.0kg)
- Set of Two (2) turning plates

11-850

SNAP-ON ROD LEVEL FOR ALUMUINUM RODS



Built-in 30-minute vial



APPLICATIONS

- Land surveying
- General construction
- I aw enforcement
- Road construction
- Utilities
- Real estate appraisals



PS 401M

1M PROFESSIONAL MEASURING WHEEL, METRIC

All-steel construction with accuracy 1cm measuring and belt-driven counter. Professionals can count on the durable design and accurate, reliable measuring with a 32cm (1m circum.) steel-spoked wheel that provides best performance on rough terrain.

- 5-digit belt-driven counter records up to 9,999.9 meter with convenient rest knob
- 1m circumference spoke wheel and wide rubber tire makes it easier to measure accurately on rough terrain & uneven around
- Wheel brake prevents slipping and allows for easy transport without losing measurement

PROFESSIONAL SERIES

PROFESSIONAL SERIES

CONTRACTOR SERIES

CONTRACTOR SERIES

- Built-in wheel stand keeps wheel upright
- Easy-grip handle folds for compact storage when not in use

| sku | wheel dia. | circum. | units | wgt | extended height | collapse height |
|-----------|------------|---------|-------|----------------|-----------------|-----------------|
| 31-PS401M | 0.31m | 1m | m | 4.3lb (1.95kg) | 45.5" (116cm) | 21.5" (55cm) |

APPLICATIONS

- Land Surveying
- General construction
- Law enforcement
- Road construction
- Utilities
- Landscaping



PS 301

SPOKED 3' PROFESSIONAL MEASURING WHEEL

All-steel construction with an 11-1/2" (3-ft circumference) steel-spoked wheel that provides best performance on rough terrain for construction, utilities, land surveying and other measuring applications. Most popular wheel in performance, durability, and value.

- · 5-digit ratchet-style mechanical counter records up to 99,999 feet with rest knob
- Steel-spoked wheel, wide rubber tire registers single feet click (3-ft per revolution)

Built-in wheel stand keeps wheel upright

- Wheel brake prevents wheel from slipping and allows for easy transport without losing existing measurement
- · Easy-grip handle quickly collapses for compact storage when not in use

| sku | wheel dia. | circum. | units | wgt | extended height | collapse height |
|----------|------------|---------|-------|---------------|-----------------|-----------------|
| 31-PS301 | 11-1/2 in | 3 ft. | ft | 5.3lb (2.4kg) | 45.5" (116cm) | 26.5" (67cm) |

APPLICATIONS

- Landscaping
- General construction
- Law enforcement
- Road construction
- Real estate appraisals
- Home remodeling



RS 312/RS 312M

12-1/2" / 0.318M CONTRACTOR MEASURING WHEEL

Aluminum three-spoke wheel with precision molded wide rubber tire. Affordable, easy to use measuring wheel and more accurate on rough terrain than other wheels on the market.

- · 5-digit, easy-read counter
- 3-section aluminum telescopic handle with lever locks collapses for easy storage
- Robust, industry-proven meter housing is durable, heavy duty poly cast
- · Measures in both directions
- Reset switch to set counter to <00000>
- Comfortable, ergonomic pistol grip
- · Fold-away kick stand keeps wheel upright when not in use

| sku | wheel dia. | circum. | units | wgt | extended height | collapse height |
|-----------|------------|---------|-------|---------------|-----------------|-----------------|
| 31-RS312 | 12-1/2 in | 3 ft. | ft/in | 3.2lb (1.5kg) | 44.5" (113cm) | 26" (66cm) |
| 31-RS312M | 0.318m | 1m | m/dm | 3.2lb (1.5kg) | 44.5" (113cm) | 26" (66cm) |

APPLICATIONS

- Home remodeling
- Interior design
- Real estate appraisals
- General construction



RS 104

COMPACT 4" MEASURING WHEEL, FT/IN

Compact measuring wheel is lightweight and durable. Wide, precision molded tire provides accurate measurements on any smooth, hard surface from interior floors to sidewalks.

- 5-digit, easy-read counter measures 9,999 feet, 11 inches
- · Heavy-duty 1-ft circumference poly cast six-spoke plastic wheel with rubber tread
- 3-section aluminum telescopic handle with lever locks collapses for easy
- Robust, Industry-proven meter housing is durable, heavy duty poly cast
- Measures in both directions
- Reset switch to set counter to <00000>
- Easy grip handle

| sku | wheel dia. | circum. | units | wgt | extended height | collapse height |
|----------|------------|---------|-------|--------------|-----------------|-----------------|
| 31-RS104 | 4 in | 1 ft. | ft/in | 1lb (0.45kg) | 38.5" (98cm) | 18.3" (46.5cm) |



SitePro PS-Series measuring wheels are guaranteed with a three (3) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.



SitePro RS-Series measuring wheels are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty



34



34-SERIES

FIBERGLASS TAPES

- Durable with non-woven pvc-coated fiberglass, waterproof
- Dual-sided graduations
- Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- Tape width is 1/2" with various graduations available



| sku | length | unit of measure |
|-----------|-----------|--|
| 34-Y1001 | 100' | 10ths/100ths |
| 34-Y2001 | 200' | 10ths/100ths |
| 34-Y3001 | 300' | 10ths/100ths |
| 34-Y1008M | 100' /30m | Side 1: Inch /8ths; Side 2: Meter /cm /mm |
| 34-Y1001M | 100' /30m | Side 1: 10ths /100ths; Side 2: Meter /cm /mm |
| 34-Y1658M | 165' /50m | Side 1: Inch/8ths; Side 2: Meter /cm /mm |
| 34-Y1651M | 165' /50m | Side 1: 10ths /100ths; Side 2: Meter /cm /mm |

| sku | length | unit of measure |
|-----------|------------|---|
| 34-Y1008 | 100' | Inch /8ths |
| 34-Y2008 | 200' | Inch /8ths |
| 34-Y3008 | 300' | Inch /8ths |
| 34-Y3008M | 300' /100m | Side 1: Inch /8ths; Side 2: Meter /cm /mm |
| 34-Y30M | 30M | Meter /cm /mm |
| 34-Y50M | 50M | Meter /cm /mm |
| 34-Y100M | 100M | Meter /cm /mm |

90 day warranty.

32-SERIES

STEEL TAPES

- Accurate and durable high tempered steel tapes with temperature stability for superior performance.
- Nylon coated wear-resistant graduated tape withstands the extreme conditions
- Dual-sided graduations
- Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- Tape width is 1/2" with various graduations available.

| | 1141 | |
|----------|--|-------------------|
| 32-30030 | The same of the sa | B End Type |

| sku | length | end type* | unit of measure |
|-----------|--------|-----------|-----------------|
| 32-10010B | 100' | В | 10ths/100ths |
| 32-20010B | 200' | В | 10ths/100ths |
| 32-30010B | 300' | В | 10ths/100ths |
| 32-10080B | 100' | В | Inch/8ths |

| sku | length | end type* | unit of measure |
|-----------|--------|-----------|-----------------|
| 32-20080B | 200' | В | Inch/8ths |
| 32-30080B | 300' | В | Inch/8ths |
| 32-30MA | 30m | А | Meter/cm/mm |
| 32-50MA | 50m | А | Meter/cm/mm |

90 day warranty.

35-SERIES

DEPTH GAUGE TAPES

Lightweight fiberglass tapes are rugged and versatile, ideal for measuring in water, mud, and rough terrain.



| sku | length | units |
|----------|--------|-----------|
| 35-2588 | 25' | Ft/In |
| 35-5088 | 50' | Ft/In |
| 35-10088 | 100' | Ft/In |
| 35-20088 | 200' | Ft/In |
| 35-30MM | 30M | Metric/mm |
| 35-50MM | 50M | Metric/mm |

SmartTRAK(((

THE SMART CHOICE FOR LOCATING FERROUS METALS



ST101

SMART-TRAK™ MAGNETIC LOCATOR

The Smart-TRAK is the smart choice for locating manholes, steel covers, septic systems, corner survey markers, cast iron pipes, iron valves, and re-bar. The ST100 series feature one-handed operation with pinpoint accuracy and large visual display.

- Precision-crafted superior ergonomics and balanced design for one-handed operation
- Large LCD screen for visual search results 0-99 numeric indicator with signal strength bar graph and battery level indicator
- High-grade waterproof speaker is water resistant and dust proof to ensure years of dependable operation
- · Robust co-molded housing is water resistant and dust proof to ensure years of dependable operation
- Waterproof tube (IP67) and tip for locating even in the toughest environments and weather conditions



ST102

10-ft (3m)

SMART-TRAK™ MAGNETIC LOCATOR

The ST102 features patent pending *Smart-Search Technology*™ that provides pinpoint accuracy around fences or other large metal objects.

- Precision-crafted superior ergonomics and balanced design for one-handed operation
- · Large LCD screen for visual search results 0-99 numeric indicator with signal strength bar graph, North/South polarity indicator, and battery level indicator
- Four (4) modes of operation: Standard, Erase, Smart+, Smart-
- High-grade waterproof speaker is water resistant and dust proof to ensure years of dependable operation
- · Robust co-molded housing is water resistant and dust proof to ensure years of dependable operation
- Waterproof tube (IP67) and tip for locating even in the toughest environments and weather conditions

MANHOLE COVERS

10-ft (3m)





MADE IN >

SmartTrak is proudly made in U.S.A.



SmartTrak locators are guaranteed with a seven (7) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty



SEPTIC TANK HANDLES

6-ft (1.8m)

CAST IRON PIPE (4")



17-RF48E,17-RF64E

48 OZ / 64 OZ ENGINEER'S HAMMER

- Made from forged steel head which is hardened and tempered
- Dual machine finished faces that are beveled and fully polished
- Designed for striking spikes and hardened nails, cold chisels, brick chisels, punches, star drills
- Textured yellow fiberglass handle which allows for heavier blows in an environment where there is limited swing
- · Ribbed grip to help prevent slipping

17-EWB3-4LB

4LB CLUB/DRILLING HAMMER

Made from forged steel head which is hardened and tempered. Ideal for use with chisels, punches, star drills and hardened nails.

- 10-Inch Handle & Shock Reduction Grip
- Permits heavy blows with limited swing
- Head and handle are forged in one piece and have a black UV coating
- · Both faces are fully polished





17-FP18FY

18" FROST PIN

Ideal for breaking up hardened, dried earth as well as frozen ground.

- Made of 1" diameter high grade tool steel
- 2" button top and a hardened diamond point
- Weighs 4.0lb (1.8kg)

17-GAD18

18" GAD

Ideally used to break, chip, chisel and pry rocks apart.

- Size: 3/4" x 1-1/2"
- · Hardened-steel tip
- Made of high-grade tool steel
- Weighs 5.3lb (2.4kg)





17-MCP32-FH

MANHOLE COVER PICK

Ideal for lifting drain grate and manhole cover safely while protecting your hands from injury as well as back and other injuries.

- Made of 5/8" hex high grade tool steel
- Harden steel flat head tip
- Length: 32"



17-AX8901

4.5LB WOOD SPLITTING MAUL

- Ideal for splitting wood or driving wedges and stakes
- · Fully forged and hardened steel head
- 3-1/2" geometric blade optimizes penetration to blast tough logs apart
- · Forged, heat-treated steel is finished with a rust-resistant coating
- Durable straight-grained Hickory handle

COLO22-W

Shown in Packaging

- Hawk length: 8"; Overall length: 36"
- Overall weight: 6.5lb (2.9kg)

17-AX3902

1.75LB AXE W/ HICKORY HANDLE

- Compact axe intended for bringing down or cutting up small to medium sized trees
- · Fully forged and hardened steel head
- 4-3/8" geometric blade optimizes penetration
- 13.5" curved shaft handle is made of durable straight-grained Hickory
- Hawk length: 6-3/8" (16.2cm)
- Head weight: 1.75lb (0.79kg)
- Overall length: 15.3" (38.9cm)
- Weighs: 2.4lb (1.1kg)



World's Best Selling Machete

with Lifetime Guarantee

COLO SERIES

HEAVY DUTY MACHETES

SIZES | 18" | 22" | 24" | 28"

The COLO-Series machetes are heavy duty tempered steel blade for strength and longevity and world's best selling machete with lifetime guarantee1.

- · Colombian made
- 5" (127mm) ergonomic handle is made of durable engineered wood for better gripping power and longevity
- · 2.5mm thick, hot roll tempered high carbon steel blade for strength (49
- Sharpenable blade extends through the riveted handle for durability
- Blade lengths: 18", 22", 24

| 4", and 28" | 1 | > | | | | | |
|---|---------------------|--------------------|-----------|---------------|------------------|--|--|
| sku | blade length | handle type | thickness | HRC rating | wgt | | |
| 17-C0L024-W* | 24-1/4" (61.6cm) | Engineered Wood | 2.5mm | 49 (+/- 1) | 22.0oz (623g) | | |
| 17-COLO28-W | 27-15/16" (71cm) | Engineered Wood | 2.5mm | 49 (+/- 1) | 22.8oz (646g) | | |
| 1 Guaranteed not to break with normal use. Find more details at dwsitepro.com | | | | | | | |

| 17-COLO18-W* | 18" (45.7cm) | Wood | 2.5mm | (+/- 1) | 19oz (580g |
|--------------|---------------------|--------------------|-------|---------------|----------------|
| 17-COLO22-W* | 22-1/8" (56.2cm) | Engineered Wood | 2.5mm | 49 (+/- 1) | 20.50 (580g |
| | 0 116 111 | | | | |

^{*}Packaged wiith sheath available. Call for details.

CROC SERIES

MARTINDALE® PRO MACHETES

SIZES | 18" | 22" | 24" | 28"

The CROC-Series Machetes are made from British steel that are hand rolled. Each knife is individually made by a hand rolling process from high quality British carbon steel, which makes the blades strong and durable.

- 2.25mm thick carbon steel blade is strong and durable (45-52 HRC)
- 5" (127mm) handle is available in solid beech wood or durable plastic
- · Turn-back grip handle

38

| sku | blade length | handle type | thickness | HRC rating | wgt |
|-------------|---------------------|-------------|-----------|------------|---------------|
| 17-CROC22-P | 21-3/4" (55.3cm) | Plastic | 2.25mm | 45-52 | 18.4oz (522g) |
| 17-CROC22-W | 21-3/4" (55.3cm) | Wood | 2.25mm | 45-52 | 20oz (567g) |
| 17-CROC24-P | 23-3/4" (60.3cm) | Plastic | 2.25mm | 45-52 | 20oz (567g) |

- · Sharpenable blade extends through the riveted handle for durability
- Blade lengths: 22", 24", and 28"

| sku | blade length | handle type | thickness | HRC rating | wgt |
|-------------|---------------------|-------------|-----------|------------|---------------|
| 17-CROC24-W | 23-3/4" (60.3cm) | Wood | 2.25mm | 45-52 | 21.8oz (618g) |
| 17-CROC28-W | 27-1/2" (69.9cm) | Wood | 2.25mm | 45-52 | 22.4oz (635g) |



RS-SERIES

CUSTOM-FIT SUNGLASSES

LENS POLARIZED NON-POLARIZED

- Sleek and contemporary with comfort fit
- Soft, pliable TPR material on tips and pads
- · Adjustable saddle nose pads for a comfort-fit
- · Polycarbonate lenses prevent scratching
- Tapered lens to eliminate refraction

| sku | lens type | frame color | |
|-----------|---------------|-----------------|-------|
| 24-RS21W | Non-polarized | ANSI Z87.1+2010 | White |
| 24-RS21WP | Polarized | ANSI Z87.1+2010 | White |
| 24-RS21B | Non-polarized | ANSI Z87.1+2010 | Black |
| 24-RS21BP | Polarized | ANSI Z87.1+2010 | Black |





CN-SERIES

3-POINT FIT SUNGLASSES

LENS POLARIZED NON-POLARIZED

- · Comfortable, stylish design
- Soft, pliable TPR material on tips and pads
- Frames are conveniently lightweight with durable, comfortable straight temple design
- · Polycarbonate lenses prevent scratching

| sku | lens type | | frame color |
|-----------|---------------|-----------------|-------------|
| 24-CN21B | Non-polarized | ANSI Z87.1+2010 | Black |
| 24-CN21BP | Polarized | ANSI Z87.1+2010 | Black |
| 24-CN21C | Non-polarized | ANSI Z87.1+2010 | Camouflage |
| 24-CN21CP | Polarized | ANSI Z87.1+2010 | Camouflage |

NOTE: Polarized lenses create sharper, clearer vision and filter light from above and below to minimize glare and maximize visibility. Non-polarized lenses are better suited for LCD/GPS devices.

CERTIFICAT

24-M2PR-BA

PROTECTIVE FACE COVER

SIZE ONE SIZE FITS MOST

- Soft, Comfortable face cover made with high quality light weight materials
- Ideal for outdoor and indoor use traveling (trains, subway, airplanes) or in crowded areas
- Cotton/Polyester blend is made to resist the spread of bodily fluids when speaking, coughing, or sneezing
- High efficiency rayon inner polypropylene filter 99% bacterial filtration tested
- Hypoallergenic, non-toxic- suitable for all day wear
- Hand washable up to 30 times

24-MECOOL

COOLIE™ COOLING TOWEL

SIZE ONE SIZE FITS MOST

- Advanced PVA cooling technology
- · Feels significantly cooler than ambient air
- Activates fast and easy run under cold water for one minute
- Wear for hours or for quick relief
- Simply re-wet to reactivate
- Machine washable
- Size: 12" x 36" (30 x 90cm)



39

SNC5500 / SNC5600

SAFETY NECK SHADE FOR HARD HATS

SIZE ONE SIZE FITS MOST

- One size fits most hard hats
- Elastic band to secure onto hat
- Two colors available
- 3/4" (19mm) grey reflective stripes with contrast color binding

| sku | sizes available | color | reflective stripping |
|------------|-------------------|------------|---|
| 23-SNC5500 | One Size Fits All | Flo-Lime | 3/4" (19mm) reflective strip with orange contrast |
| 23-SNC5600 | One Size Fits All | Flo-Orange | 3/4" (19mm) reflective strip with yellow contrast |
| | | | |





750 SERIES

PREMIUM CLASS 2 SURVEYOR'S VEST

SIZES | S M L XL 2X 3X

- Made from durable, heavy-duty ANSI/ISEA compliant polyester and polyester mesh
- · Padded collar on the inside
- Back pouch for additional storage
- Multiple outside pockets, two inside pockets, and dual mic clips
- Solid polyester front with mesh back for ultra-cool comfort

| sku | color | reflective stripping |
|-----------|------------|---|
| 23-750-FL | Flo-Lime | 2" (51mm) thick strip with 4" (102mm) wide flo-orange color |
| 23-750-F0 | Flo-Orange | 2" (51mm) thick strip with 4" (102mm) wide flo-yellow color |





Lower inside zippered pockets with load-bearing strap for notebook or IPad



Back pouch with dual heavyduty zipper for additional storage of documents or blueprints



Plastic drawstring toggle spring (Available in 2022) to adjust waist area for desired fit



Back is made of polyester mesh for comfort and climate control

770 SERIES

CLASS 3- ANSI/ISEA 107-2010

PREMIUM CLASS 3 SURVEYOR'S VEST

SIZES | S M L XL 2X 3X

- Designed for surveyors and professionals
- Front is made of polyester for durability; back is made of polyester mesh for comfort and climate control
- Padded collar designed for comfort and to help regulate body temperatures
- Fluorescent yellow vest has 4" wide orange reflective material with 2" wide silver reflective material stripes
- Quality heavy-duty zipper front closure
- Two exterior mic clips
- Multiple outside pockets for cell phone, flagging tape, radio, pencils, maps, etc., plus inside pockets
- Two spray can holders on the hips of the vest that include straps for keeping the cans in place until they're needed

| sku | color | reflective stripping |
|-----------|----------|---|
| 23-770-FL | Flo-Lime | 2" (51mm) thick strip with 4" (102mm) wide flo-orange color |

SIZING CHART

| | S | M | L | XL | 2X | 3X |
|------------------------------------|--------|--------|--------|--------|--------|--------|
| CHEST WIDTH MEASUREMENT | 36-38" | 40-42" | 44-46" | 48-50" | 52-54" | 56-58" |
| LENGTH FROM HIGH POINT OF SHOULDER | 26" | 26.5" | 27.75" | 28.5" | 28.5" | 29.5" |

This sizing chart is relevant for all SITEGEAR 750 Series and 770 Series Vests.



40





MACHETE SHEATHS

Leather sheath keeps your machete safe guarded and handy, protects machete while carrying on your side or during transport. Heavy duty formed leather is side-stitched with durable nylon thread and then riveted at strain points. Built for quality, strength, and longevity.

- Made of heavy duty top grain leather for durability and maximum life
- Double side-stitched and riveted at strain points

| • | Durable, reinforced | 1-1/2" | wide | belt | loop | fits |
|---|---------------------|--------|------|------|------|------|
| | up to 3-in belt | | | | | |

Available for: 18", 22", 24", and 28" machete

| sku | designed for | actual length | fits blade width | wgt |
|---------|--------------|---------------|------------------|---------------|
| 17-LS18 | 18" machete | 17-1/2" | 2-1/2" | 0.45lb (204g) |
| 17-LS22 | 22" machete | 21-1/2" | 2-1/2" | 0.52lb (235g) |

| sku | designed for | actual length | fits blade width | wgt |
|---------|--------------|---------------|------------------|---------------|
| 17-LS24 | 24" machete | 23-1/2" | 2-1/2" | 0.61lb (276g) |
| 17-LS28 | 28" machete | 27-1/2" | 2-1/2" | 0.73lb (331g) |

17-406

LEATHER QUIVER FOR MARKING PINS

Leather quiver keeps your survey marking pins handy at your side. Heavy duty formed leather is side-stitched with durable nylon thread and then riveted at strain points. Built for quality, strength, and maximum life.

- Holds up to twelve (12) 14" marking pins
- Side-stitched and riveted at strain points, reinforced bottom
- Durable, reinforced 1-1/2" wide belt loop fits up to 3" belt

1016/2432

PLUMB BOB SHEATHS

- Keeps your plumb bob handy at your side
- Made of top grain leather for durability and maximum life
- Tapered pocket with snap-button strap fits and secures plumb bob
- Riveted and stitched in heavy duty nylon thread for extra durability
- Slits to fit 2-in belt insertion

| sku | designed for |
|---------|--------------------------|
| 15-1016 | 16 to 18 ounce plumb bob |
| 15-2432 | 24 to 32 ounce plumb bob |
| | |

51-10107

7-POCKET SURVEYOR'S TOOL POUCH

Surveyor's tool pouch is made of top grain saddle leather and features seven (7) pockets. Stores field book, plumb bob marking pins, folding rule, scribe, survey tacks and nails, and pencils.

- Riveted and stitched in heavy duty nylon thread for extra strength and durability
- Tunnel loop saddle fits up to 2-1/2 in belt
- Tapered pocket with snap-button strap secures up to 16-oz plumb bob
- Easy access front pocket snap-lid for tacks or nails

51-10218G

SHEATH FOR GAMMON REEL & PLUMB BOB

Heavy-duty leather scabbard with stitched and riveted pockets provides snug and convenient pockets with cut-out hole on front for easy access.

- Holds 16-18 oz plumb bob and Gammon Reel® or tape
- Riveted and stitched in heavy duty nylon thread for extra strength and durability
- Snap button straps secure plumb bob and Gammon Reel in pockets
- Slits for up to 3-in belt insertion

Gammon Reel® is a registered trademark of Dave White's SitePro



*Plumb bob and GammonReel not included

51-10109

PRO CONTRACTOR'S TOOL POUCH

- Made of top grain saddle leather
- Nine (9) pouches stores field book, 16oz. plumb bob, marking pins, folding rule, scribe, survey tacks and nails, and pencils.
- Riveted and stitched in heavy duty nylon thread for extra strength and durability
- Tunnel loop saddle fits up to 2-1/2-in belt
- Tapered pocket with snap-button strap secures plumb bob
- Easy access front pocket snap-lid for tacks or nails

SITEGEAR

41

51-11422P

LEATHER KNEE PADS

- Wide adjustable leather buckle strap with steel buckle
- Made of top grain leather
- 1" thick water repellent soft felt lining shaped to fit your knees and add extra comfort
- Stitched with heavy duty nylon thread and riveted for extra strength
- · One size fits most





SITEGEAR



51-15018-DB

3-POUCH TOOL BAG WITH TAPE HOLDER

- Pockets/tool holders: 11 (right hand type)
- 8-inch deep pouch, tape holster designed to hold up to a 35' tape, and holders for hammer, work knife, lumber crayon, chisel, small level, pencils
- Built for easy access with the right hand and are worn on the right side of the body
- Main pouch: 9 x 8";
 Two Outer pouches: 5.2 x 5.5"
- Fits belt size up to 3" wide



51-10110-TS

10-POCKET TOOL AND NAIL POUCH

- Pockets/tool holders: 12
- Made of top grain oily-tanned leather
- Left, right side steel swinging hammer ring holders
- Double-gusset front pocket
- Contrasting heavy duty suede trim and stitching
- Fits belt size up to 3" wide



51-15062

4-POUCH PRO FASTENER BAG WITH HOLDERS

- Pockets/tool holders: 10, (left hand type)
- 8-inch deep pouch and holders for angle square, cat's paw loop, 1" blade square, driver bits, pencils
- Built for easy access with the left hand and are worn on the left side of the body
- Main pouch: 9 x 8"; Middle pouch: 7 x 6"; Outer pouch: 5.6 x 5.6": Upper pouch: 4.6 x 4.6"
- Fits belt size up to 3" wide



51-15060

3-POUCH PRO FASTENER BAG WITH HOLDERS

- Pockets/tool holders: 9, (right hand type)
- Designed to hold tools and fasteners for framing and carpentry applications
- Holders for angle square, cat's paw loop, 1" blade square, driver bits, pencils, etc
- Fits belt size up to 3" wide
- Main pouch: 9 x 8"; Outer pouch: 7 x 6"; Upper-pouch: 4.6 x 4.6"



51-15024

LARGE PRO UTILITY BAG

- Pockets:
- Large pouch designed to hold fasteners for framing and carpentry applications
- Designed with an extra deep bag
- Fits belt size up to 3" wide
- Main pouch: 10" x 10.5"



2 BAB

51-15019

COMPACT PRO UTILITY BAG

- Pockets:
- Designed to hold fasteners (or use as a tool holder) for framing and carpentry applications
- Compact design is ideal for that third bag in the back
- Fits belt size up to 3" wide
- Main pouch: 7.75" x 8"



SITEGEAR Pro Leather Bags and Pouches are guaranteed with a two (2) year limited warranty. visit our website for more details.



SITEGEAR

51-15089

7-POUCH PRO FRAMER SET

SIZES | M L XL XXL

The SITEGEAR 15089 is designed with heavy-duty thick leather, crafted with durable heavy duty nylon thread and rivets for extra strength and durability. The SITEGEAR work gear is built tough and durable to meet the needs of professionals on any construction jobsite.

- · Left side fastener has one extra bag for maximum fastener capacity
- Pockets/tool holders: 23
- Available Sizes (belt): M, L, XL, and XXL
- · Weight: 6.0lb



Four sizes available: Medium (51-15089-M), Large (51-15089-L), X-Large (51-15089-XL) and XXL-Large (51-15089-XXL). See page 44 for information - How To Size Your Work Belt.

Framer set with suspenders (#51-15009) also available. Three sizes available: Medium (51-15089S-M), Large (51-15089S-L), X-Large (51-15089S-XL), and XX-Large (51-15089S-XXL).

51-B2617

PRO FRAMER BALLISTIC COMBO TOOL BELT

- 6-piece carpenter's combo is the perfect belt Padded, adjustable suspenders for any tradesman or professional builder's needs
- · 28 convenient pockets
- Designed with rugged, lightweight ballistic poly fabric and double-stitched pockets to survive all wear/tear
- · Wide padded belt system with steel roller buckle for comfort - fits waist sizes: 29-inches to 46-inches
- Removable carry handles for easy carrying
- Weighs 4.1lb (1.86kg)



51-15009

LEATHER WORK SUSPENDERS

- Traditional heavy duty leather suspenders
- Hand crafted from Bridle leather with large shoulder pads
- Heavy duty spring clips snap to your work belt
- Direct connection loop attachment hardware
- · Fully adjustable




51-10113-TSB

10-POCKET NAIL & TOOL BAG

- Pockets/tool holders: 13
- · Made of top grain oily-tanned leather
- · Snap-lock pouch handle
- · Double-gusset front pocket
- Swinging hammer ring holder; steel tape measure clip; Web loop for pry bar

• Includes 2" web belt (one-size-fits-all)



51-10644R

PRO DRYWALLER TOOL BAG

- Pockets/tool holders: 7
- Front and Side mounted hammer ring holder
- Protective leather sheath for saw pocket
- Main inner pouch includes inner loops for tool organization



SITEGEAR



51-12101 M L XL XXL

2" TOP GRAIN LEATHER BELT

- Leather 2" work belt- rugged and comfortable
- Constructed with thick bridal leather
- Heavy duty steel roller buckle is reinforced with a nickel finish
- Edge stitched for quality, appearance and strength



51-12035 MLXLXXL

3-IN RANGER WORK BELT

- Leather 3" ranger style work belt with 2" wide tongue
- Constructed with high quality bridle leather with nickel plated steel roller buckle
- Edge stitched for quality, appearance and strength
- Steel rivet reinforcement



51-12102 MLXL

2" DOUBLE GROMMET BELT

- Double-pronged roller buckle keeps it secure
- 2-in poly web belt is durable and weather resistant
- Edge stitched with heavy duty nylon thread
- Ends are finished top grain oil-black leather for comfort and appearance

HOW TO SIZE YOUR WORK BELT?

To size your tool belt, place your existing tool belt on an even surface and measure it from the end of the buckle to the most commonly used hole. Select the belt size by the mid point that is closest to your

Sizes: M (33" to 35"), L (36" to 39"), XL (40" to 44"), XXL (

HOW TO SIZE YOUR TOOL BELT?

Mid Point with 4-in of Range Each Direction

If you do not have a current tool belt to measure, you can get an approximate mid range measurement by adding 4-inches to your pant waist size.

51-11220

PRO HAMMER HOLDER

- · Made of heavy duty customtanned top grain leather
- Steel hammer ring is wedged between two layers of leather and stitched with heavy duty nylon thread
- Rivets and Edge stitching in contrasting heavy duty nylon thread for durability and maximum life
- Slits to fit up to 3" (76mm) belt

51-B4122

PRO BUCKET TOOL

ORGANIZER Fits most 5 gallor

buckets 60-pockets: includes pocket

for drill holster and pockets for organizing drill bits

Made of durable, rugged 600D poly NEW!

51-B1528 **ELECTRICIAN'S** TOOL POUCH

 Three (3) main pockets allow for easy access of

Steel loop hammer holder, snap hook and electrical tape web strap

Flat bottom design helps stabilize pouch when placed on surfaces



51-11137

HIGH MOUNT TAPE HOLDER

- Made of heavy duty top grain leather
- Belt worn (up to 3" belt)
- Made to fit up to 35' tape
- · Rivets for durability
- · Cut-out bottom for easy access to tape

51-11230

TAPE HOLDER

- · Made of heavy duty top grain leather
- Belt worn (up to 3" belt)
- Made to fit 25' to 30' tape
- Rivets and edge stitching in contrasting heavy duty nylon thread for durability and maximum life
- · Cut-out bottom for easy access to tape





51-B1528

11" ELECTRICIAN & MAINTENANCE TOOL CARRIER

- 32 pockets with built-in measuring tape clip
- Flapped external pocket; Large open-top center cavity
- Water-resistant Ballistic quality material, made of reinforced 600D polyester, reinforced rivets
- Durable molded polypropylene base; Non-slip, ergonomic carrying handle with key clip
- Inner dimensions: 9.25" L x 10.5" D x 10.25" H

51-B1535

18-IN WIDE MOUTH TOOL BAG

- · Wide mouth top and large interior compartment with HD zipper
- Durable water-resistant Ballistic quality material, made of reinforced 600D polyester, reinforced rivets
- 19 pockets, slots includes a zippered pocket
- Durable molded polypropylene base
- Padded adj. shoulder strap with non-slip handle
- Weighs 3.6lbs (1.63kg)









GAMMON REEL°

#G001

PLUMB LINE REEL FOR SURVEYOR

- Allows for simple and fast plumb bob set-up and adjustments
- · Designed for use in the surveying field
- Stainless steel wear-guard
- 6-1/2 ft (1.9 m) Red string



15-G001

Gammon Reel® Plumb Line Reel for Surveyors (6-1/2 foot)

GAMMON REEL

#G012

PLUMB LINE REEL FOR CONSTRUCTION

- Allows for simple and fast plumb bob set-up and adjustments
- Designed for use in the construction field
- 12-ft (3.6m) fluorescent-red string
- Power return quickly retracts, eliminating tangled string



15-G012

Gammon Reel® Plumb Line Reel for Construction (12-ft)

15-G012B

Gammon Reel® Plumb Line Reel for Construction (12-ft), Black

GAMMON REEL

#G015

GAMMAGNET® MAGNETIC CASE FOR #G001

- Provides versatility for construction plumb line reel
- Strong neodymium (rare earth) magnet securely mounts to any steel surface
- Built-in nail sleeve for use with wood surfaces



15-G015

GAMMAGNET® magnetic case, for use with #G012

#G002

REPLACEMENT STRING

- Refill string is made of high-quality nylon
- · Innovative bobbin case keeps string wound and safely stowed.
- 24 yd. replacement string
- Strong 72-lb test nylon string
- Choice of six (6) available colors



| item# | color | length (yards) | length (feet) | length (meters) |
|------------|--------------------|----------------|---------------|-----------------|
| 15-G002-0 | Original Orange | 24 yards | 72-ft | 22m |
| 15-G002-FR | Fluorescent Red | 24 yards | 72-ft | 22m |
| 15-G002-FY | Fluorescent Yellow | 24 yards | 72-ft | 22m |

PLUMB BOBS

SitePro plumb bobs are precision machined for perfect balance and treated for a lasting finish.

- · Brass construction
- Steel ASA screw cap allows storage for extra
- Includes a hardened steel point with ASA thread-stored inside cap

| SKU | wgı |
|--------|--------------|
| 15-016 | 16 oz (454g) |
| 15-018 | 18 oz (510g) |

| 15-024 | 24 oz (680g) |
|--------|--------------|
| 15-032 | 32 oz (907g) |

PLUMB BOB SHEATHS

- · Heavy duty and riveted for long life
- · Made of top grain saddle leather
- Strong metal snap secures bob in sheath



| sku | description | designed for | |
|---------|------------------------|-----------------------|--|
| 15-1016 | Small Plumb Bob Sheath | 16oz - 18oz Plumb Bob | |
| 15-2432 | Large Plumb Bob Sheath | 24oz Plumb Bob | |

GAMMON REEL® and GAMMAGNET® are trademarks of Dave White's SitePro

CONTRACTOR KITS

GAMMON REEL KIT W/ PLUMB BOB AND SHEATH

The Gammon Reel kits are ideal for the contractor. Leather sheath keeps your plumb bob and Gammon Reel handy at your side.


- Riveted and stitched in heavy duty nylon thread for extra strength and durability
- Snap button straps secure plumb bob and Gammon Reel in pockets
- Slits for up to 3-in belt insertion
- · Gammon Reel and plumb bob included

16-oz (#15-016) 12-ft (#15-012) 15-1021GR16KIT 15-1021GR18KIT 18-oz (#15-018) 12-ft (#15-012)

SURVEY BOOKS


The SitePro survey books are made of quality white paper with extrastiff hard cover book. Published on quality paper, cover protected by a water barrier with blind embossing.

- 80 Sheets (160 pages)
- · Quality content paper
- Ruled light blue with red vertical



- Size: 4-1/2" x 7-1/4"
- Reference tables/diagrams in back section







| sku | description | left page | right page | #pages |
|----------|-------------|-----------------------------|-----------------------------|--------|
| 17-325-L | Level Book | Six (6) Vertical Columns | Six (6) Vertical Columns | 160 |
| 17-350-T | Field Book | Six (6) Vertical Columns | 8 x 4 Grid | 160 |

13-642

TOPOGRAPHIC ABNEY LEVEL

- Square sighting tube with internal focusing telescope
- Dual interchangeable arcs: one arc graduated in percentage of grade/degrees (bi-directional, 0° to 60°) and one graduated in percentage of grade/topographic scale



- Length: 6-3/8" (16.1cm)
- Includes belt loop case

651 / 661

TRANSIT COMPASS

- · Graduated circle for optimal versatility
- · Dampened for superior stability
- · Includes velvet lined, belt-loop case for storage and transport





| | description |
|--------|---------------------------------------|
| 17-651 | Compass, Transit Pocket 0-360 Degrees |
| 17-661 | Compass, Transit Pocket Quadrants |

13-632

6" BRASS HAND LEVEL

- 2-power magnification
- 6" (15.2cm) long draw eyepiece extends to 7-1/2" (19.1cm)
- · Internally mounted bubble assembly

13-590

2.5X HAND LEVEL

- 2.5-power magnification
- · Convenient pocket-sized tool for establishing a level line of sight
- · Ideal for preliminary survey and simple distance estimation
- · Stadia and vertical lines



(12.7cm)

· Pocket clip

· Includes carrying case

17-911

DOUBLE RIGHT ANGLE PRISM

- · Large field of view and foresight viewing glass
- · Center lens permits foresight viewing
- Step off angles of 90° and 180°
- Includes carrying case



43-D620

2X SIGHTING HAND LEVEL

- · Ideal for preliminary survey and simple distance estimation
- Sturdy impact resistant aluminum body and easy-to-read protected



17-100

4-DIGIT TALLY COUNTER

- · Four-digit mechanical counter counts up to 9999, with reset to zero
- Audible click
- Easy reading digits with protective window






PM 220 SERIES

DUAL-TIP PERMANENT MARKERS FOR PROFESSIONALS

The SitePro PM 220 Series is a six inch durable-poly barrel permanent marker with dual tip design to maximize useage. Features heavy-duty chisel felt-tip and fine felt-tip on other end with reinforced nib construction.



 Fast drying with fade resistant non-toxic permanent ink

 6-inch high strength poly barrel is leak-proof

• Sold in box of 12 markers each



Side One Large (7mm) Chisel Tip



Side Two Fine Tip



| sku | description | |
|---|------------------------------------|-------|
| 17-PM220-B Permanent Marker for Professionals | | Black |
| 17-PM220-R | Permanent Marker for Professionals | Red |

207

GIANT CONCRETE SCRIBE

- Ideal for fine line marking on metal and stone
- Machined aluminum handles with diamond knurling for sure grip
- Precision ground carbide scribe tip
- Pocket clip and protective cap

| sku | description | tip |
|---|-------------|---------|
| 17-207 7-1/2 in Concrete Scribe, with Replaceable Tip | | Carbide |
| 17-201-10 Replacement Tip (Pack of 10) | | Carbide |

17-401

14-IN MARKING PINS

Used primarily by land surveyors and are also known as chaining pins.

- 14-in (35.5cm) length
- 3/16" (4.8mm) spring steel, heat-treated
- Powder-painted red and white, alternating at each 1-inch (25.4mm)
- Eleven (11) marking pins
- Weigh 1.6lb (.73kg) per 11 pins

Leather Quiver available on page 40

Call: (765) 581-4097 | Fax: (765) 581-4098 | Website: dwsitepro.com

17-411

CARRYING RING FOR MARKING PINS

- 3/16" (4.8mm) spring steel, heat-treated
- Power-painted white
- Eye with slip hook locks ring to secure pins

700 SERIES

NEW!

Side Two

SURVEY MARKERS

- · Cast from solid brass
- Ideal for boundary or general survey markers
- Shank is ribbed to prevent turning or loosening
- Non-glare finish
- · Available in both flat and domed head design



| sku | length | head type |
|--------|-------------------|-----------|
| 19-700 | 1-3/8 in (34.9mm) | Flat |
| 19-701 | 2 in (50.8mm) | Flat |
| 19-702 | 2-1/2 in (63.5mm) | Flat |
| 19-703 | 3 in (76.2mm) | Flat |
| 19-705 | 2 in (50.8mm) | Domed |
| 19-706 | 2-1/2 in (63.5mm) | Domed |
| 19-707 | 3 in (76.2mm) | Domed |

DWSITEPRO

HI-MAGNETIC MASONRY NAILS

3 times easier to locate than other nails on

the marketMost preferred by professionals

- Zinc plated to resist corrosion
- Large targeted center point
- Large targeted contor point
- 6 sizes available from 2-1/2 to 3/4 inches in length

| sku | Shank Length | Shank Diameter | head diameter | ct per box |
|--------|--------------------|------------------|---------------|------------|
| 20-751 | 3/4 in (19.05mm) | 1/8 in (3.18mm) | 5/16-in | 100 |
| 20-752 | 1 in (25.4mm) | 3/16 in (4.76mm) | 3/8-in | 100 |
| 20-753 | 1-1/4 in (31.75mm) | 3/16 in (4.76mm) | 1/2-in | 100 |
| 20-754 | 1-1/2 in (38.1mm) | 1/4 in (6.35mm) | 9/16-in | 100 |
| 20-755 | 2 in (50.8mm) | 1/4 in (6.35mm) | 9/16-in | 100 |
| 20-756 | 2-1/2 in (63.5mm) | 1/4 in (6.35mm) | 9/16-in | 100 |

19-750

3/4" STAKE TACKS, ZINC PLATED

- New and improved zinc plated surveyor tacks
- 3/4-in length
- 1lb (0.45kg) per box
- Approximately 750 tacks per box

| sku | description | wgt |
|------------|---|--------------|
| 19-750 | 3/4-in (19mm) Stake Tacks, Zinc-Plated | 1lb (0.45kg) |
| 19-BALL750 | 3" (76mm) Rubber Sponge Tack Ball with Loop | |



STAKE FLAGS

STEEL WIRE FLAGS

Ideal to ensure consistent communication and long-lasting visibility for utility construction, line locating, forestry, and landscaping.

- Steel wire constructed of rust-resistant alloy steel
- Flags made of long lasting PVC material with high visibility ink color
- Tear resistant for high performance to -20°F
- Flag is glued to staff for durability
- Packaged in bundles of 100 flags (10 bundles per box)



NEW!

| sku | flag size | length | color | flags in box | box gross wgt |
|-------------|-----------|--------|------------|--------------|---------------|
| 19-F4521-B | 4" x 5" | 21" | Blue | 1000 | 23lbs |
| 19-F4521-G | 4" x 5" | 21" | Green | 1000 | 23lbs |
| 19-F4521-GL | 4" x 5" | 21" | Glo-Lime | 1000 | 23lbs |
| 19-F4521-G0 | 4" x 5" | 21" | Glo-Orange | 1000 | 23lbs |
| 19-F4521-GP | 4" x 5" | 21" | Glo-Pink | 1000 | 23lbs |
| 19-F4521-R | 4" x 5" | 21" | Red | 1000 | 23lbs |
| 19-F4521-W | 4" x 5" | 21" | White | 1000 | 23lbs |
| 19-F4521-Y | 4" x 5" | 21" | Yellow | 1000 | 23lbs |

| sku | flag size | length | color | flags in box | box gross wgt |
|-------------|-----------|--------|------------|--------------|---------------|
| 19-F4530-B | 4" x 5" | 30" | Blue | 1000 | 31lbs |
| 19-F4530-G | 4" x 5" | 30" | Green | 1000 | 31lbs |
| 19-F4530-GL | 4" x 5" | 30" | Glo-Lime | 1000 | 31lbs |
| 19-F4530-G0 | 4" x 5" | 30" | Glo-Orange | 1000 | 31lbs |
| 19-F4530-GP | 4" x 5" | 30" | Glo-Pink | 1000 | 31lbs |
| 19-F4530-R | 4" x 5" | 30" | Red | 1000 | 31lbs |
| 19-F4530-W | 4" x 5" | 30" | White | 1000 | 31lbs |
| 19-F4530-Y | 4" x 5" | 30" | Yellow | 1000 | 31lbs |

FTP SERIES

SALAMANDER® GLOW FLAGGING TAPE, 4MIL

- Bright, long-lasting high visibility glo-colors
- -30°F temperature resistance
- Smooth, bright, and reflective appearance
- 4.0 mil thickness
- Environmental protection material
- Packaged in box of 12 rolls





SW6 SERIES

6-IN STAKE WHISKER MARKERS

Ideal for quick, easy identification for survey and construction sites, reference points, stake markers, underground utilities, and so much more.

 Available in bright APWA and international utility code colors: blue, green, glo-orange, glo-pink, red, white, yellow.

• Highly visible, durable and cost-effective

 Installs quickly and easily, fits all wooden stakes and 60-penny nails

• Packaged in bundles of 25 whiskers (20 bundles per box of 500 whiskers)



| sku | height | color | whiskers/bundle |
|-----------|------------|------------|-----------------|
| 19-SW6-B | 6" (150mm) | Blue | 25 |
| 19-SW6-G | 6" (150mm) | Green | 25 |
| 19-SW6-G0 | 6" (150mm) | Glo-Orange | 25 |
| 19-SW6-GP | 6" (150mm) | Glo-Pink | 25 |
| 19-SW6-R | 6" (150mm) | Red | 25 |
| 19-SW6-W | 6" (150mm) | White | 25 |
| 19-SW6-Y | 6" (150mm) | Yellow | 25 |



Site MAX

NEW!

Our product line of SiteMAX™ bags are constructed of high strength

Ballistic nylon-fiber material with heavy duty hardware and reinforcement stitching. The internal seams of the SiteMAX Ballistic bags are bound to prevent fraying which provide maximum toughness and durability. Select from the many styles designed to fit your needs in the field or on the jobsite.

21-B81520

BALLISTIC TRIPOD BAG

- Designed to hold most major brands of aluminum or wood tripods
- Constructed of high strength ballistic nylon-fiber material with inner reinforcement lining
- High-grade abrasion-resistant material on bottom and 8-in (20.5cm) up the side is tough and rugged in wet, dry, and extreme conditions
- Unique double draw string design for quick closure of bag once tripod is inside
- Three (3) large pockets made of tough nylon fiber material with pull tab to store other gear
- Heavy duty adjustable padded shoulder strap and hand loop for easy handling and carry

21-B248

48" BALLISTIC LATH BAG

- Hold and carry 48" (122cm) laths
- Constructed of high strength ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and 8-in (20.5cm) up the side is tough and rugged in wet, dry, and extreme conditions with moisture control airlet grommet
- Three (3) large 8" W x 10" D (20.5cm x 25.4cm), pleated outside pockets for markers, paint, and other supplies
- Heavy duty adjustable padded shoulder strap and hand loop for easy handling and carry
- Overall size: 45" T x 8" W (114.5cm x 20.5cm)
- Wgt: 2.9lb (1.3kg)



21-B236

36" BALLISTIC LATH BAG

- Hold and carry 36" (92cm) lath
- Constructed of high strength ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and 8-in (20.5cm) up the side is tough and rugged in wet, dry, and extreme conditions - with airlet grommet
- Three (3) large 8" W x 10" D (20.5cm x 25.4cm), pleated outside pockets with pull tab for markers, paint, and other supplies
- Heavy duty adjustable padded shoulder strap and hand loop for easy handling and carry
- Overall size: 34" Tall x 8" Wide (86.4cm x 20.5cm)
- Wgt: 2.45lb (1.1kg)



Call: (765) 581-4097 | Fax: (765) 581-4098 | Website: dwsitepro.com

21-B758

24" BALLISTIC STAKE BAG

- Designed to hold 24-inch (60cm) wood survey stakes or iron rebar
- Constructed of high strength ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and back side is tough and rugged in wet, dry, and extreme conditions - with airlet grommet
- Heavy duty adjustable padded shoulder strap and hand loop
- Five (5) Pockets: Three (3) large 8" W x 10" D (20.5cm x 25.4cm), pleated front outside pockets for markers, paint, and other supplies; Two (2) 6.5" W x 9" D (2.6cm x 22.9cm) pleated side pockets.
- Overall inner size: 24" L x 10" W x 14" H (61 x 25.4 x 35.6cm). Wgt: 2.95lb (1.34ka)

21-B718

18" BALLISTIC STAKE BAG

- Designed to hold 18-inch (46cm) wood survey stakes or iron rebar
- Constructed of high strength ballistic nylonfiber material with inner lining
- High-grade abrasion-resistant material on bottom and back side is tough and rugged in wet, dry, and extreme conditions - with moisture control airlet grommet
- Heavy duty adjustable padded shoulder strap and hand loop
- Five (5) Pockets with three (3) large 6" W x 10" D (15.3 x 25.4cm), pleated front outside pockets for markers, paint, and other supplies
- Overall inner size: 19" L x 11" W x 14" H (48.5 x 28.0 x 35.6cm). Wgt: 2.55lb (1.16kg)

21-BPC50P

BALLISTIC SPRAY CAN HOLDER WITH POCKETS

- Designed to hold a standard size marking paint can at your hip for easy access
- Pockets to hold a folding rule, marker pens; pencils
- Constructed of high strength ballistic nylon-fiber material for durability and longevity
- Webbed belt loop fits a 2.25-in wide belt
- Webbing strap with Velcro to safely hold paint can in place
- Overall, inside: 7.5" x 3" (19.1 x 7.6cm). Wgt: 0.25lb (0.12kg)

21-BPC50

BALLISTIC SPRAY CAN HOLDER

- Designed to hold a standard size marking paint can
- Webbed belt loop fits a 2.25-in wide belt
- Constructed of high strength ballistic nylon-fiber material for durability and longevity
- Overall, inside: 7" x 3" (18cm x 7.6cm). Wgt: 0.10lb (0.05kg)





21-200

48" STANDARD LATH BAG

- Hold and carry 36" or 48" (92cm or 122cm) laths
- · Constructed with high strength fiber material with reinforced base
- Three (3) large, pleated outside pockets for markers, paint, and other materials
- · Heavy duty adjustable shoulder strap
- Overall inside: 8" x 33.5" (20cm x 84cm)
- · Color: Hi-vis orange



21-248

48" REINFORCED LATH BAG

- Hold and carry 48" (122cm) lath
- High strength fiber material with tough, waterproof and abrasionresistant material at the bottom and 6" (15cm) up the side
- 8" (20cm) diameter bucket style bottom
- Three (3) large, pleated outside pockets for markers, paint, and other materials
- Heavy duty adjustable shoulder strap and hand loop
- Overall inside: 8" x 45" (20cm x 114cm)
- Color: Hi-vis orange



21-236

36" REINFORCED LATH BAG

- Hold and carry 36" (92cm)
- · High strength fiber material with tough, waterproof and abrasion-resistant material at the bottom and 6" (15cm) up the side
- 8" (20cm) diameter bucket style bottom
- Three (3) large, pleated outside pockets for markers, paint, and other materials
- Heavy duty adjustable shoulder strap and hand
- Overall inside: 8" x 33.5"(20cm x 84cm)
- Color: Hi-vis orange



HEAVY DUTY DESIGNS FOR PURPOSE, DURABILITY, AND STYLE

21-28102

38" LATH BAG, HEAVY-DUTY WITH HANDLES

- Constructed with high strength fiber material; tough with heavy duty stitching and reinforced bottom
- · Designed to hold up to 50 lath or rebar
- Carries up to 50 lath or rebar
- Bottom of bag features tough, waterproof and abrasion-resistant composite material
- 7 large pockets and slots: One (1) large pocket, two (2) small pockets, one (1) can holder, 3 small market slots
- · Heavy duty adjustable padded shoulder strap and two hand loops
- Overall dimensions: 9" x 38" (23cm x 97cm)
- · Color: Hi-vis orange

21-758

24" STAKE BAG, HEAVY-DUTY

- Designed to hold 24-inch (60cm) wood survey stakes or iron rebar
- Five (5) large pockets made of tough nylon fiber material to store flagging tape, nails, or other gear
- · Constructed with high strength fiber material; tough with heavy duty stitching and reinforced bottom
- Bottom of bag features tough, waterproof and abrasion-resistant composite material
- Heavy duty adjustable shoulder strap for carrying
- · Grommet drain holes are positioned at both end of bag

21-718

18" STAKE BAG, HEAVY-DUTY

- Designed to hold 18" wood survey stakes or iron rebar
- Constructed with high strength fiber material; tough with heavy duty stitching and reinforced bottom
- · Bottom of bag features tough, waterproof and abrasion-resistant composite material
- · Heavy duty adjustable shoulder strap for
- Five (5) large pockets made of tough nylon fiber material to store flagging tape, nails, or other gear
- Grommet drain holes are positioned at both end of bag







21-81540

56" GPS TRIPOD BAG, HEAVY-DUTY

The SitePro heavy duty GPS tripod bag is designed to protect and carry heavy duty GPS antenna tripod (#09-100).

- · Ends of the bag are protected with tough, waterproof and abrasionresistant composite material
- · Heavy duty adjustable shoulder strap is detachable
- Two hand loops with built-in Velcro grip

Constructed with high strength fiber material; tough, waterproof and abrasion-resistant material at bottom

- Heavy duty zipper and stitching for greater durability
- Overall Inside: 8" x 56" (20.3cm x 142cm)

21-81520

HEAVY DUTY TRIPOD BAG

- Holds all major brands of aluminum or wood tripods
- Constructed with high strength fiber material; tough with heavy duty stitching and reinforced bottom
- · Double pull string ties at the top
- Three (3) large pockets made of tough nylon fiber material to store other gear
- · Grommet drain hole at end of bag
- Heavy duty adjustable shoulder strap for carrying
- Weight: 1.85lb (0.85kg)

21-PC50

SPRAY CAN HOLDER

- Holds a paint can on hip for easy access: designed to carry a standard size spray-paint
- Heavy duty nylon construction with nylon webbing belt loop that fits up to a 2-in wide belt
- · Color: Hi-vis orange
- Wat: 0.14lb (0.06kg)

21-2547

TOP LOADING FIELD CASE FOR TOTAL STATION,

HEAVY-DUTY

This heavy duty padded field case fits most total stations. Designed as a backpack and constructed with water-resistant nylon.

- Constructed with high strength fiber material; tough with heavy duty stitching and reinforced bottom
- · Designed to load instrument from the top of case
- 2-in thick foam padding on all inner sides
- · Bottom of case is protected with a tough waterproof and

abrasion-resistant composite material

- · Inside dimensions for total station: 14.0 x 9.0 x 7.0-in (36 x 23 x 18cm)
- Weight: 6.75lb (3.1kg)



21-PC50P

PAINT CAN HOLDER WITH POCKETS

- · Paint can pocket lined with reinforcement for easy in and out of can
- · Designed with pockets to hold a folding rule (which includes a Velcro strap), marker pens, pencils, and other items
- · High strength fiber material that is tough and abrasion-resistant
- · Velcro safety strap
- · Heavy duty belt loop with reinforced stitching that fits up to a 2-in wide belt
- · Color: Hi-vis orange



21-2542

LARGE PADDED BAG

- · Extra thick padding on all inner sides for protection of your device
- Suitable for use with triple tilting prism
- · Strap handles for carrying
- · Heavy-duty zipper
- Inside dimensions: 9" x 7" x 2" (22.9cm x 17.8cm x 5.1cm)
- Weighs 0.5lb (0.34kg)



OTHER CASES





| sku | description | designed for |
|---------|----------------------|--------------------------|
| 21-1200 | Padded bag, tribrach | 05-1200 Series tribrachs |
| 21-2010 | Padded bag, prism | 03-2010M, 03-1010 prisms |

21-2581

JUMBO PADDED BAG

- · Ideal for triple prisms and prism targets or tribrach kits
- Thick padded interior
- Heavy-duty zipper
- Inside dimensions: 10" x 9.5" x 3" (25.4cm x 24.1cm x 7.7cm)
- Outside dimensions: 12" x 12.5" x 8" (30.5cm x 32cm x 20.3cm)
- Outside pocket
- Weighs 1.06lb (0.48kg)



OUR BRANDS

GAMMON REEL

GAMMON REEL®, founded in 1962, provides line reels for both surveying and construction, as well as the GAMMAGNET® magnetic case for steel beam construction. GAMMON REEL is a well-known and respected brand in the surveying and construction industry.

David White®

David White®, founded in 1895 (Milwaukee, Wisconsin), provides productivity tools for leveling, layout and measuring in the construction and surveying industries. The David White brand is offered exclusively by Dave White's SitePro.



The SITEGEAR® brand is focused to provide best-in-class solutions for professionals in the construction and industrial market with workgear that works.



The SALAMANDER® brand is focused to provide professionals in the construction and industrial market with all-environment, high-visibility products.

Dave White's SitePro is a leading supplier of surveying and contractor's tools, accessories, optical and laser instruments, measuring devices, site gear, and field supplies for surveyors, industrial and construction use.

SitePro aims to give its customers the value and quality they seek to increase performance and best in class customer service. We're constantly

looking for better solutions to improve the customer experience. Our customers deserve the best experience every time, and improving upon that is our priority.

SitePro products are sold through a network of dealers and distributors and also as private-labeled products. Please contact us with any questions or suggestions.



Dave White's SitePro

Lafayette, IN

email: info@dwsitepro.com website: www.dwsitepro.com

© 2022 copyright Dave White's SitePro LLC. All rights reserved. SitePro and the Aperture & D W logo are trademarks of Dave White's SitePro LLC, in the United States and in other countries. Gammon Reel, GAMMAGNET, SITEGEAR, and Salamander are registered trademarks of Dave White's SitePro LLC. The David White brand and logo are exclusive trademarks to Dave White's SitePro. All other trademarks are the property of their respective owners. Due to the printing process, the colors of the products printed in this catalog may vary slightly from the actual product. Product images are not to scale. Design and specification of products are subject to change without notice.